



ELEKTRONISCHE FEUCHTIGKEITSMESSGERÄTE
electronic moisture meters

STANDORT location



TRADITION & INNOVATION



OUR EXPERTISE FOR YOUR SUCCESS

Our family-owned company was founded in 1931 and is located in the core area of Baden-Württemberg, Germany. For more than 60 years, we have gathered expertise in moisture measurement and provide our customers with various products that are based on this knowledge. Already in 1948, GANN created and produced the first Hydromette unit.

We are committed to our company philosophy »**Quality has a name**«. Therefore we design and manufacture our products only in Germany.

We are focusing on two main business activities – **handheld meters** as well as **measuring and control systems** for timber dryers. Within our handheld meter range, we manufacture units for measuring applications such as wood, construction materials, bulk materials, air humidity, and temperature. Tailored to the needs of our customers, our units provide various combinations of these application options ranging from simple test units to customised professional solutions and complex high-end all-in-one equipment. Our control systems cover a large variety of different pro-

cess control systems for timber dryers as well as cycle measuring systems for the glued laminated timber industry – from simple control systems to convenient, nearly fully automated systems that hardly require user intervention.

This catalogue provides an overview of our products and solutions for electronic moisture meter applications. On the first few pages, the latest meter generation of our **GANN BlueLine Series** is shown. In addition to our **Compact and Classic Series Hydromette** units, the second part of the catalogue presents a summary of the accessories available for our meters, including a large number of figures showing real-world applications. At the end of our catalogue, you will find some information on the topic of »**Measuring accuracy**« that is relevant to real-world implementations.

Enjoy reading our catalogue – your GANN team!


LEGEND



Wood
Moisture



Bulk
Materials



Structural
Moisture



Air Humidity



Temperature



Grain
Humidity*



Accessories



Package

■ **WOOD MOISTURE** Products and accessories that are identified by this icon are used to measure moisture in wood. For this, our Hydromette units use two measuring techniques: **electrical resistance measurement** or **capacitive radio frequency measurement**.

■ **BULK MATERIALS** Products and accessories that are identified by this icon are used to measure moisture of bulk materials, e.g. saw dust, wood chips, etc. For these purposes, our HS or HST electrodes are used. They use the **electrical resistance measuring principle**.

■ **STRUCTURAL MOISTURE** Products and accessories that are identified by this icon are used to measure moisture in building materials. Four measuring techniques are used: **electrical resistance measurement**, **capacitive radio frequency field**, **sorption isotherms**, and the **Calcium Carbide Method (CM)**.

■ **AIR HUMIDITY** Products and accessories that are identified by this icon are used to measure air relative humidity. For measuring, **capacitive sensors** are used that operate rapidly and precisely.

■ **TEMPERATURE** Products and accessories that are identified by this icon are used to measure temperatures. For measuring surface temperatures, **resistance-based Pt100 sensors** and **infrared sensors** are used.

■ **GRAIN HUMIDITY** Products and accessories that are identified by this icon are used to measure humidity of various grain types and cereals, e.g. wheat, rye, green coffee, pepper. For this purpose, **electrical resistance measurement** is used.

■ **ACCESSORIES** For products that are identified by this icon, additional accessories are available which are detailed in the second part of the catalogue.

■ **PACKAGE** For products that are identified by this icon, packages of different contents (different product accessory combinations) are offered.

At the bottom of a product page, an **info box** is used to show the accessory available, arranged according to the particular measuring task. Similarly, we provide an overview on each accessory page by means of an **info box** showing the products to which the respective accessory may be connected.

* = Special catalogue available on request

- **02 Legend**
- **03 Contents**
- **04 BlueLINE SERIES**
 - 05 BL COMPACT
 - 06 BL COMPACT S
 - 07 BL COMPACT B
 - 08 BL COMPACT TF 2
 - 09 BL COMPACT RH-T 165 & 320
 - 10 BL COMPACT RH-T FLEX 250 & 350
 - 11 BL COMPACT IR
 - 12 BL COMPACT TF-IR
 - 14 BL H 40
 - 15 BL HT 70
 - 16 BL E
 - 17 BL UNI 10
- **18 COMPACT SERIES**
 - 19 COMPACT LB
 - 20 COMPACT
 - 21 COMPACT S
 - 22 COMPACT A
 - 23 COMPACT B
- **24 CLASSIC SERIES**
 - 25 H 35
 - 26 HT 65
 - 27 HT 85 T
 - 28 M 2050
 - 29 Packages
 - 30 HB 30
 - 31 UNI 1
 - 32 UNI 2
 - 33 Packages
 - 34 RTU 600
 - 35 M 4050
- **36 CM UNITS**
 - 37 CM-B
 - 38 CM-P
 - 39 CM Accessories and Replacement Parts
- **40 DATA LOGGER**
 - 41 Klima I, Klima II, Klima II-KT
- **42 Accessories for WOOD MOISTURE**
- **45 Accessories for BULK MATERIALS**
- **48 Accessories for STRUCTURAL MOISTURE**
- **55 Accessories for AIR RELATIVE HUMIDITY**
- **59 Accessories for TEMPERATURE**
- **66 Accessories MISCELLANEOUS**
- **72 Replacement Parts**
- **75 Measuring Accuracy**
- **80 Drying Process Monitoring**
 - 82 Accessories
 - 84 Replacement Parts

OUR BlueLINE SERIES COMPACT UNITS



- Handy units for quick moisture measurement
- 3-line LCD display
- MIN, MAX, and HOLD feature
- Automatic unit shutdown
- 9V block battery or rechargeable battery
- Housing: 175 [L] x 50 [W] x 30 mm [H]



QUALITY MADE IN GERMANY



HYDROMETTE BL COMPACT

The BL Compact unit is an electronic **moisture meter** for **various types of wood** as well as for **soft building and insulating materials**.

The sensor pins are driven into the material to be measured and allow the measurement of moisture in sawn timber, chipboard, veneers and wood fibre materials up to 25 mm in thickness as well as of regular gypsum and mixed plaster. After measuring, the construction material specific minimum and maximum values can be retrieved.

MEASURING RANGES

- **WOOD MOISTURE**
6 to 25% (dry mass)
- **STRUCTURAL MOISTURE**
0.4 to 6.0 wt.-%

PROPERTIES

- 4-level wood species correction
- Characteristic curves for 3 types of building materials and 2 types of insulating materials
- Unit temperature display
- 195 mm [L]




APPLICATION

The BL Compact unit may also be used to measure plaster.



ORDER CODE 12010

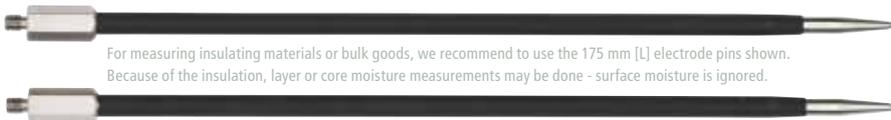

For measuring insulating materials or bulk goods, we recommend to use the 175 mm [L] electrode pins shown. Because of the insulation, layer or core moisture measurements may be done - surface moisture is ignored.

COMPACT BI 175 STICK-IN ELECTRODE PINS 14352



HYDROMETTE BL COMPACT S



The BL Compact S is an electronic **moisture meter** for various **wood fuels**, suited for measuring **various types of hardwood or softwood**.

BENEFITS

- Environmental protection (lower emission)
- Oven and chimney protection (better combustion)
- High energy yield, since the wood is burned in its optimum moisture state

MEASURING RANGE

- **WOOD MOISTURE**
 - 10 to 50% (dry mass)
 - 10 to 34% water content

PROPERTIES

- 2-level wood species correction
- Unit temperature display
- 195 mm [L]



APPLICATION

Measuring the moisture of firewood using the **BL Compact S** unit – the best energy balance and lowest emission values are obtained at approx. 20% wood moisture

The **BL Compact** and **BL Compact S** units come with a **protective cap** fitted.



For measuring insulating materials or bulk goods, we recommend to use the 175 mm [L] electrode pins shown. They are not insulated and therefore show the most humid spot of a cross section.

COMPACT HW 175 STICK-IN ELEKTRODE PINS 14351



HYDROMETTE BL COMPACT B

The BL Compact B unit is an electronic **structural moisture meter** for non-destructive building material moisture measurement. The Hydromette unit uses the dielectric constant/radio frequency principle of measurement. The versatile ball sensor is used to sense moisture in building materials of any kind as well as to determine the **moisture distribution** in walls, ceilings, and floors.

For each building material, an individual limit may be set the violation of which will be indicated by an **audible alert**.

An ideal **pre-tester** for all CM measurements.

MEASURING RANGE

- **STRUCTURAL MOISTURE**
 - 0 to 100 digits (scanning range)
 - 0.3 to 6.0 wt.-% or
 - 0.3 to 4.0 CM-%

PROPERTIES

- Characteristic curves for 7 types of building materials and 2 types of insulating materials as well as trend display for hardwood and softwood
- Audible alarm feature
- Automatic calibration
- Unit temperature display
- 200 mm [L]



APPLICATION It is of importance **how the unit is held** while measuring: The **BL Compact B** unit should be held at the rear part of the unit and applied to the material to be measured in a 90° angle.





HYDROMETTE BL COMPACT TF 2



The BL Compact TF 2 unit is a **precise thermo hygrometer** for measuring the temperature and air relative humidity **in many applications** (e.g. residential space, air conditioning, printing shops, warehouses, museums).

On the easy-to-read display, three different measured values may be shown, e.g. a combination of air humidity, air temperature, and dew point temperature.

MEASURING RANGES

- **AIR HUMIDITY**
0 to 100% R.H.
 $\pm 2\%$ R.H. (20 to 80% R.H.) (*)
- **TEMPERATURE**
-20 to +70 °C
 ± 0.5 °C (-10 to +60 °C) (*)

(*) = sensor accuracy

PROPERTIES

- Automatic calculation of dew point temperature and equilibrium wood moisture content (EMC)
- Display of absolute air humidity in g/m^3

- USB interface for transferring the measured values to a PC on which the DIALOG BL+ optional software is executed (for long-term measurements or process monitoring)
- Storage of the 5 most recent measured values
- 185 mm [L]



Equilibrium wood moisture content for a climate meter?

Read more on this topic on www.gann.de



BlueLINE

HYDROMETTE BL COMPACT RH-T 165/320



APPLICATION Moisture measurement using **sorption isotherms** for quantitatively assessing damage caused by moisture

The BL Compact RH-T 165/320 unit is a **precise thermo hygrometer** designed to be used for quickly measuring the relative **humidity** and **temperature of the air**.

Using programmed **sorption isotherms**, the weight and mass percentages can be determined for various building and insulation materials, as well as for hardwood and softwood. The meter has a **slim sensor pipe** and is therefore suited to be used for a large variety of applications, e.g. humidity analyses in cases of damage, while the building is drying as well as for checking whether flooring or wall covering may be laid.

MEASURING RANGES

■ AIR HUMIDITY

0 to 100% R.H.

±1.8% R.H. (10 to 90% R.H.) (*)

■ TEMPERATURE

-20 to +70 °C

±0.5 °C (-10 to +70 °C) (*)

(*) = sensor accuracy

PROPERTIES

- Automatic calculation of dew point temperature, equilibrium wood moisture content, absolute humidity in g/m³, enthalpy in kJ/K, wet-bulb temperature in °C, and water activity (a_w)
- Sorption isotherms for hardwood and softwood as well as for 10 different types of building materials
- Storage of the 5 most recent measured values
- 355/510 mm [L]

SENSOR PIPE LENGTHS

165 x 5.5 mm [Ø] 12040 | 320 x 5.5 mm [Ø] 12041





HYDROMETTE BL COMPACT RH-T FLEX 250/350

ORDER CODE 12045/12046



The BL Compact RH-T FLEX 250/350 unit is a **precise thermo hygrometer** designed to be used for quickly measuring the relative **humidity** and **temperature of the air**. Using programmed **sorption isotherms**, the weight and mass percentages can be determined for various building and insulation materials, as well as for hardwood and softwood.

The unit has a **slim and flexible sensor pipe (gooseneck)** and is therefore particularly suited to be used for **humidity analyses**, e.g. for damage survey or while the building is drying. Additional applications include **checking whether** flooring or wall covering may be laid.

MEASURING RANGES

- **AIR HUMIDITY**
0 to 100% R.H.
±1.8% R.H. (10 to 90% R.H.) (*)
- **TEMPERATURE**
-20 to +70 °C
±0.5 °C (-10 to +70 °C) (*)

(*) = sensor accuracy



APPLICATION The flexible sensor pipe can be used to easily and conveniently carry out measurements in places that are difficult to access.

PROPERTIES

- Automatic calculation of dew point temperature, equilibrium wood moisture content, absolute humidity in g/m³, enthalpy in kJ/K, wet-bulb temperature in °C, and water activity (a_w)
- Sorption isotherms for hardwood and softwood as well as for 10 different types of building materials
- Storage of the 5 most recent measured values
- 440/545 mm [L]

SENSOR PIPE LENGTHS

250 x 6.5 mm [Ø] 12045 | 350 x 6.5 mm [Ø] 12046





HYDROMETTE BL COMPACT IR

The BL Compact IR unit is an electronic **infrared surface temperature meter** for non-contact measurements on different material surfaces. The Hydromette unit has a built-in **laser pointer** to indicate the position of the measuring spot. The unit is ideally suited for **detecting thermal bridges**, checking the dew point temperature,



APPLICATION The **laser pointer** shows the position of the measuring spot.



and measuring live, moving or vibrating parts. Particularly suited for objects having a low thermal capacity, e.g. wood, glass, insulating materials etc. as well as for locating **heating pipes or coils**.

MEASURING RANGE

■ TEMPERATURE

Infrared measuring range:

-40 to +380 °C

± 0.5 °C (0 to 60 °C), at

0 to 50 °C ambient temperature(*)

(*) = sensor accuracy

PROPERTIES

- Laser pointer for identifying the measuring spot
- 6:1 optical system
- Emissivity adjustable from 20 to 100%
- USB interface for transferring measured values to a PC on which the optional DIALOG BL+ software is executed (for long-term measurements)
- 185 mm [L]





HYDROMETTE BL COMPACT TF-IR

Please view the video on our website to see how the unit is used in real-world applications. Please use your smart phone to scan this QR code.



EXPERTISE



ORDER CODE 12070

The BL Compact TF-IR unit has sensors for surface temperature infrared measurements as well as for measuring air temperature, and air relative humidity.

This combination of the different measuring techniques enables the TF-IR unit to be used for quickly and reliably assessing dew point undershoots or determining borderline conditions on surfaces such as walls, ceilings, floors as well as on window or door lintels. In addition to displaying the measured value, the unit creates an audible signal when a critical surface temperature is detected. When using the unit in due time mould formation (fungal growth) may be prevented and occurrence of moistening caused by condensation may be assessed reliably.

MEASURING RANGES

- **AIR HUMIDITY**
0 to 100% R.H.
±2% R.H. (20 to 80% R.H.) (*)
- **TEMPERATURE**
Air temperature:

- 20 to +70 °C
- ±0.5 °C (-10 to +60 °C) (*)
- Infrared measuring range:*
- 40 to +380 °C
- ±0.5 °C (0 to 60 °C),
- at 0 to 50 °C ambient temperature (*)

(*) = sensor accuracy

PROPERTIES

- Built-in audible interval signal:
The more the surface temperature is approaching the dew point temperature, the more the signal will change from intermittent to continuous sound.
- Laser pointer for identifying the measuring spot
- 6:1 optical system
- Including dew point temperature and equilibrium wood moisture content (EMC)
- Emissivity adjustable from 20 to 100%
- USB interface for transferring measured values
- Storage of the 5 most recent measured values
- 185 mm [L]


OUR **BlueLINE** SERIES MULTIFUNCTIONAL UNITS



TAILORED – TO YOUR SPECIFIC APPLICATION



HYDROMETTE BL H 40

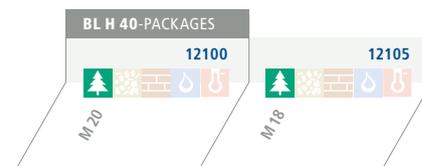

The BL H 40 unit is an electronic **wood moisture meter** that uses the resistance principle of measurement for precisely measuring **sawn timber** (up to 180 mm in thickness), **chipboards**, and **veneers**. The unit is used for individual measurements before and after processing. Additionally, the adjustable **wood temperature compensation** allows for optimisation of the measured value.

This meter is particularly suited to be used in joiner's workshops, by parquet reclining or painting contractors.

MEASURING RANGE

- **WOOD MOISTURE**
5 to 40% (dry mass)

PROPERTIES

- 7-level wood species correction (more than 300 types)
- Wood temperature compensation is done manually or automatically in the range from -10 to +40 °C through the unit temperature
- Storage of the 5 most recent measured values




APPLICATION Moisture measurement perpendicular to the wood fibre direction using an **M 20 electrode**

Various resistance-based electrodes may be connected to the **BNC socket**



- Optional: 2 customer-specific characteristic curves may be programmed in factory
- 185 mm [L]

ACCESSORIES INFO BOX





HYDROMETTE BL E



The BL E unit is an electronic **structural moisture and temperature meter** for precisely measuring **building and insulating materials**. The unit is based on the resistance principle of measurement and is used for individual measurements. The unit has a material selector for directly indicating the structural moisture in % of 23 building and insulating materials such as screeds, mortars, plasters, concrete, bricks, and a number of other insulating materials.

MEASURING RANGES

- **STRUCTURAL MOISTURE**
0 to 100 digits (scanning range)
0.1 to 42.2 wt.-%, or 0.2 to 0.9 CM-%,
depending on the material to be measured

TEMPERATURE

-50 to +350 °C, depending on the Pt100 temperature sensor

Infrared measuring range:

-40 to +380 °C using IR 40 BL

PROPERTIES

- Direct readout of the structural moisture in wt.-% or CM-% on the 3-line LCD display, resolution: 0.1% or 0.1 °C
- The temperature measurement precision is achieved by Pt100 measuring resistors connected in 4-wire technology
- Storage of the 5 most recent measured values
- Optional: 5 customer-specific characteristic curves may be programmed in factory
- 185 mm [L]



APPLICATION Measurement of **structural moisture in bricks** using an M 25-100 brush electrode pair [left-hand side] and **measurement of plaster moisture** using an M 20 electrode [right-hand side]



ACCESSORIES INFO BOX

	M 6	M 6-150/250	M 6-Bi 200/300	M 20	M 20-OF 15	M 20-Bi 200/300	M 21-100/250	M 25-100/300						
	ET 10 BL	OT 100 BL	TT 40 BL	IR 40 BL										



HYDROMETTE BL UNI 10

The BL UNI 10 unit is an electronic **multi-purpose meter** for three measured values to which a number of GANN BlueLine electrodes can be connected. The **Auto Sensor Technology** used enables the Hydromette to automatically detect the electrode connected and to adapt the measured value readout to the respective sensor type. **The following BL electrodes may be connected:**

- **B 55 BL** for non-destructive measurement and display of moisture in ceilings, walls, floors, or other building materials
- **RF-T 28 BL, RF-T 31 BL, RH-T 37 BL and RH-T 37 BL flex** for air humidity and air temperature measurement
- **TF-IR BL** for measuring climate (air humidity and temperature), infrared surface temperature for early detection of potential mould formation (fungal growth) as well as dew point temperature
- **IR 40 BL** for sensing infrared surface temperature, thermal bridges, dew point temperature
- **ET 100 BL, OT 100 BL, TT 40 BL** (Pt100 sensors) for different temperature measur-

ing tasks such as measuring solids, liquids or bulk materials, surface measurements or measurements of hot air containing dust


MEASURING RANGE

The Hydromette unit is capable of managing the measuring range of the respective connected BL electrode. For detailed information, please visit our website.

PROPERTIES

- Simultaneous readout of three measured values as well as direct readout of the structural moisture in wt.-% or CM.-% on the 3-line LCD display, resolution: 0.1% or 0.1 °C
- Quick measurement of moisture in set building materials using the capacitive radio-frequency measuring technique
- The high temperature measurement precision is achieved by Pt100 platinum measuring resistors connected in 4-wire technology
- Audible alarm in case a user-defined limit is exceeded (using B 55 BL) or intermittent alert signal in case dew point threshold regions are reached (using TF-IR BL)
- 175 mm [L]

**COMING
SOON 2012**

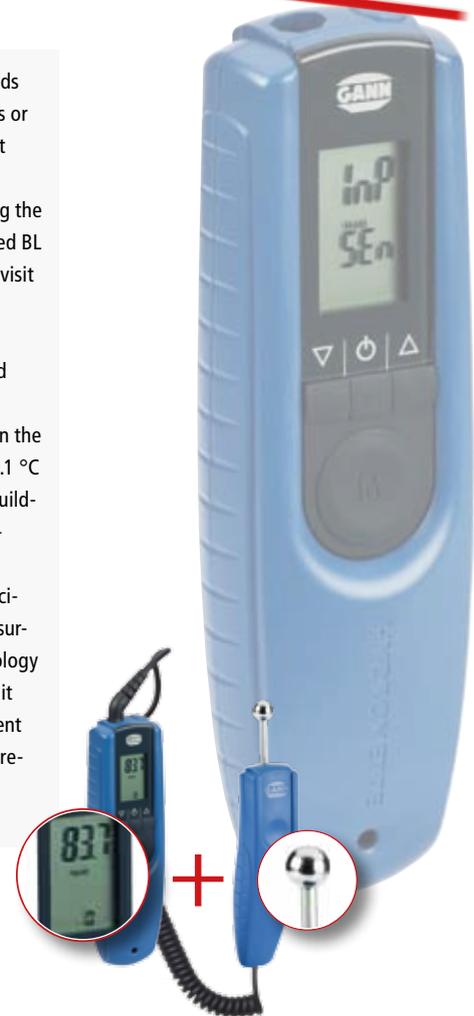

OUR HANDY COMPACT SERIES UNITS

- Handy units for quick moisture measurement
- Fully automated adjustment of the meter
- No separate electrodes or cables required
- 9V block battery or rechargeable battery





HYDROMETTE COMPACT LB

The Compact LB unit is an electronic **structural moisture meter** that uses the dielectric constant/radio frequency principle of measurement. Fitted with LCD display and versatile ball sensor that is used to **non-destructively sense moisture in building materials of any kind** as well as to determine the moisture distribution in walls, ceilings, screeds, and set building materials.

The **extendable telescopic probe** allows for quick and convenient scanning of large surfaces or components.

Particularly suited for surveyors or building restoration companies

MEASURING RANGE

- **STRUCTURAL MOISTURE**
0 to 199 digits (scanning range)
0.3 to 8.5 wt.-% or 0.3 to 6.5 CM-%
(using a conversion table)

PROPERTIES

- Extendable telescopic probe
(length from 80 to 120 cm)
- Weight 500 g



APPLICATION

The **telescopic arm** allows locations to be reached without problems that are difficult to access.





HYDROMETTE COMPACT



The Compact unit is an electronic **wood and plaster moisture meter** that uses the resist-ance principle of measurement.

The ergonomically designed housing is enclosed by the entire palm so that the measuring pins at the top of the unit can be pressed into the material to be measured. The slim pins allow the moisture in **sawn timber, chipboard, veneers, and wood fibre materials** (up to 25 mm in thickness) as well as in regular gypsum or mixed plasters to be measured.

Ideal secondary meter for painting or interior fitting contractors or experienced do-it-yourselfers.

MEASURING RANGES

- **WOOD MOISTURE**
5 to 20% (dry mass)
- **STRUCTURAL MOISTURE**
0.3 to 3.5 wt.-% (plaster moisture)

PROPERTIES

- 2-level wood species correction
- Plaster moisture measurement including direct readout in wt.-% on large 3-digit LCD display
- Comes with protective cap
- Housing: 200 [L] x 35 [W] x 35 mm [H]

APPLICATION

Measuring a wooden board using the **Compact**





HYDROMETTE COMPACT S

The Compact S unit is an electronic **moisture meter for wood fuels** featuring average value calibration for **softwood and hardwood** as well as a large 3-digit LCD display. The sensor pins at the top of the meter allow for moisture measurements to be carried out in wood of up to 30 mm in thickness.

BENEFITS

- Environmental protection due to lower emission
- Protection of oven and chimney due to better combustion
- Higher energy yield, since the wood is burned in its optimum moisture state



APPLICATION



The Compact S unit is particularly suited for checking firewood

MEASURING RANGE

- **WOOD MOISTURE**
10 to 50% (dry mass)

PROPERTIES

- Direct readout of wood moisture in %
- Comes with protective cap
- Housing: 200 [L] x 35 [W] x 35 mm [H]

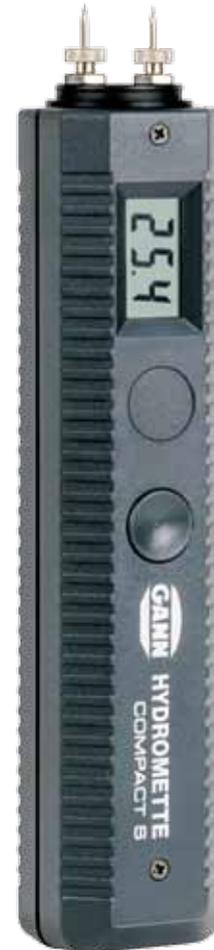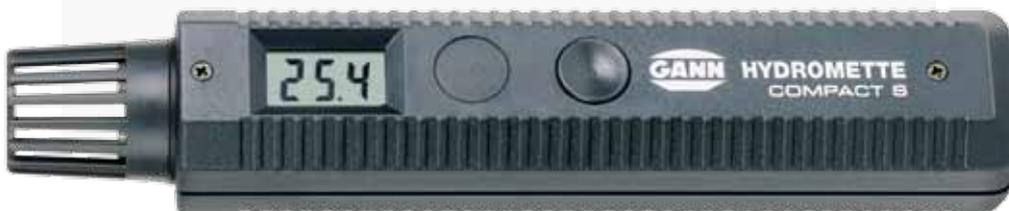



HYDROMETTE COMPACT A



VIEW showing the point-shaped surface at the bottom side of the **Compact A** unit

The Compact A unit uses the **non-destructive** dielectric constant or **radio frequency** principle of measurement and is simply placed onto the material to be measured. Thus many measurements can be performed within a short period of time. The moisture content can be read immediately. There are no electrodes to be tapped in. The moisture values can be measured in wood of up to 40 mm in thickness.

Particularly suited for painting, interior fitting, parquet reclining, or cabinet making contractors.

MEASURING RANGE

- **WOOD MOISTURE**
5 to 45% (dry mass)

PROPERTIES

- Direct readout of wood moisture in wt.-%
- Measured value correction according to type of wood or wood material from 1 to 10 using the **wood type selector**
- Housing: 170 [L] x 35 [W] x 35 mm [H]



APPLICATION

Non-destructive wood moisture measurement using the **Compact A** unit



HYDROMETTE COMPACT B



APPLICATION

The **Compact B** unit should be held at the rear part of the unit to prevent the measured value from being affected by the hand.

The Compact B unit is an electronic **structural moisture meter** that uses the **non-destructive measuring technique** that is based on the dielectric constant/radio frequency principle of measurement.

Fitted with LCD display and versatile ball sensor that is used to **sense moisture in building materials of any kind** as well as to **determine the humidity distribution** in walls, ceilings, screeds, and other set building materials.

Particularly suited for parquet reclining and floor tiling contractors in conjunction with a CM meter.

MEASURING RANGE

- **STRUCTURAL MOISTURE**
0 to 100 digits (scanning range)


PROPERTIES

- Ideal pre-tester for all CM measurements
- Housing: 200 [L] x 35 [W] x 35 mm [H]



OUR CLASSIC SERIES METERS

- Handy units for quick moisture measurement
- LCD display, resolution: 0.1%
- Fully automated adjustment of the meter
- 9V block battery or rechargeable battery

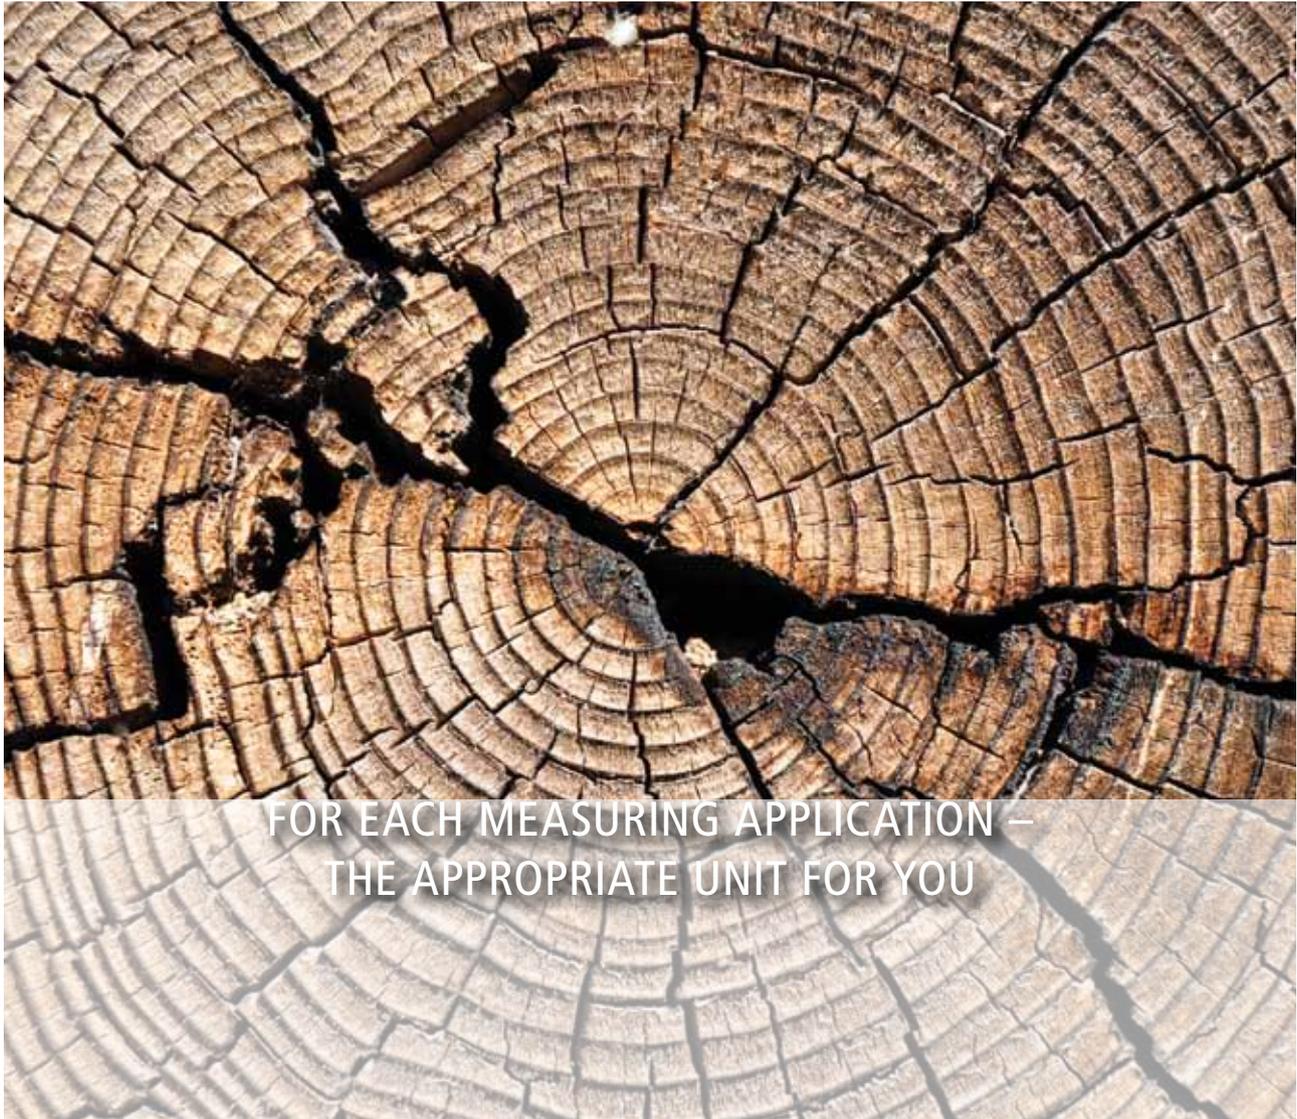

FOR EACH MEASURING APPLICATION –
THE APPROPRIATE UNIT FOR YOU



HYDROMETTE HT 65

ORDER CODE 1250



The HT 65 unit is an electronic **wood moisture meter** that uses the resistance principle of measurement for precisely measuring **sawn timber** (up to 180 mm in thickness), **chipboards**, **veneers**, **wood chips**, and similar bulk materials. The unit is used for individual measurements before and after processing. Additionally, the adjustable **wood temperature compensation** allows for optimisation of the measured value. Particularly suited for saw mills, parquet factories, and wood-processing companies.

MEASURING RANGE

- **WOOD MOISTURE**
4 to 60% (dry mass)

PROPERTIES

- Direct readout of wood moisture in % on the large LCD display, resolution: 0.1%
- 4-level wood species correction for more than 300 types of wood
- Automatic wood temperature compensation from -10 to +40 °C
- Housing: 140 [L] x 90 [W] x 42/50 mm [H]

APPLICATION

Hydromette HT 65 unit
in conjunction with an
M 20 electrode



For packages, please refer to page 29.

ACCESSORIES INFO BOX

	M 18	M 20	M 20-OF 15	M 20-HW 200/300															
	HS 500	HS-i 500	HS 1000	HS-i 1000															



HYDROMETTE HT 85 T



APPLICATION Hydromette HT 85 T unit together with an M 20 ram-in electrode

The HT 85 T unit is an electronic **multipurpose meter** for sensing three values: wood moisture, structural moisture, and temperature. It allows for precisely measuring **sawn timber** (up to 180 mm in thickness), **chipboards**, **veneers**, **wood chips**, and similar bulk materials as well as **set building materials**. Thanks to the **large wood moisture measuring range**, the unit is very well suited for individual measurements on the timber yard as well as in the operations before and after processing.

It can be combined with any number of wood moisture, equilibrium wood moisture (EMC), or temperature measuring points to monitor current drying processes. Particularly suited for interior fitting or parquet reclining contractors, wood-processing companies, industrial wood drying processes, construction companies or architects.

MEASURING RANGES

- **WOOD MOISTURE**
4 to 100% (dry mass)
- **STRUCTURAL MOISTURE**
– Refer to the overview on page 29 –

- **TEMPERATURE**
-50 to +199.9 °C
depending on the Pt100 temperature sensor

PROPERTIES

- 4-level wood species correction for more than 300 types of wood
- Automatic wood temperature compensation from -10 to +90 °C
- Quick measurement of moisture in set building materials using the resistance-based measuring technique
- The temperature measurement precision is achieved by Pt100 measuring resistors connected in 4-wire technology
- Housing: 180 [L] x 115 [W] x 53 mm [H]



For packages, please refer to page 29.

	M 18	M 20	M 20-OF 15	M 20-HW 200/300								
	HS 500	HS-i 500	HS 1000	HS-i 1000	HST 1000	HST-i 1000	HST-i 1000/S 250					
	M 6	M 6-150/250	M 6-Bi 200/300	M 20	M 20-OF 15	M 20-Bi 200/300	M 21-100/250	M 25-100/300				
	ET 10	TT 40	LT 20	TT 30	ET 50	OTW 90	OT 100	FT 2-30				



HYDROMETTE M 2050



The M 2050 unit is an electronic **wood moisture and temperature meter** that is based on microprocessor technology and provides **measured data storage** as well as connectivity to a PC or printer.

It allows for precisely measuring the moisture of **sawn timber** (up to 180 mm in thickness), **veneers, wood chips**, and similar bulk materials. **Material temperatures** may be measured as well.

The measured values may be stored individually or as a lot. The meter has a **dialogue feature** which displays error messages if applicable, so that the user may take appropriate measures.

This unit is particularly suited for saw mills, timber dealers, industrial wood drying, surveyors, or **licensed glued laminated timber companies** (DIN 1052).

MEASURING RANGES

- **WOOD MOISTURE**
4 to 100% (dry mass)

- **TEMPERATURE**

-30 to +170 °C
depending on the Pt100 temperature sensor

PROPERTIES

- Measured value storage of 3,000 wood moisture and temperature values including date and time
- Fixed stored individual wood characteristic curves for 250 types of wood
- Fully automated temperature compensation of the wood moisture measured values by means of a connected wood temperature sensor or keyboard input
- PC or printer may be directly connected for further processing the data or printing them
- Statistical evaluation of the measured values for minimum, maximum, mean values as well as standard deviation
- Special calibration for the licensed glued laminated timber industry (DIN 1052)
- Housing: 190 [L] x 115 [W] x 56 mm [H]

ACCESSORIES INFO BOX

For packages, please refer to page 29.

	M 18	M 20	M 20-OF 15	M 20-HW 200/300								
	HS 500	HS-i 500	HS 1000	HS-i 1000	HST 1000	HST-i 1000	HST-i 1000/S 250					
	ET 10	TT 40	LT 20	TT 30	ET 50	OTW 90	OT 100	FT 2-30				

CLASSIC-PACKAGES



Measuring task is supported by the Hydromette unit – the respective accessories are included in the package (short name below the symbol)



Measuring task is supported by the Hydromette unit – but this package does not include the respective accessories



Measuring task is not supported by the Hydromette unit

H 35-PACKAGES Page 25

2100 M 20
2105 M 18

HT 65-PACKAGES Page 26

2250 M 20
2255 M 18

HT 85 T-PACKAGES Page 27

2370 M 20
2375 M 18
2377 M 20 M 6

M 2050-PACKAGES Page 28

2700 M 20
2705 M 18
2707 M 18

DIALOG M+



STRUCTURAL MOISTURE MEASURING RANGES

RESISTANCE-BASED MEASUREMENTS*

HT 85 T

0 to 80 digits

0.5 to 25 wt.-% or 0.3 to 12 CM-%

RTU 600

UNI 2

M 4050

CAPACITIVE MEASUREMENTS*

0 to 199 digits (scanning range)

0.3 to 8.5 wt.-% or

0.3 to 6.5.0 CM-% using B 50, B 60, LB 70

2 to 8 wt.-% using MB 35 on concrete surfaces

HB 30

UNI 1

AIR RELATIVE HUMIDITY IN DRILLING HOLE*

5 to 98 R.H. or

0.2 to 3.7 wt.-% using RH-T 37 EL/RH-T 37 EL flex

* for HB 30, HT 85 T, UNI 1, UNI 2, RTU 600:
moisture conversion in % according to the building material using the conversion table in the operating manual

for M 4050: direct readout of the moisture values in % according to the building material



HYDROMETTE

HB 30

ORDER CODE 1510



The HB 30 unit is an electronic **wood and structural moisture meter** that uses the resistance principle of measurement for precisely measuring **sawn timber** (up to 180 mm in thickness), **chipboards, parquet, and set building materials**.

Thanks to its **connectivity for a large variety of (active) electrodes** that are used for structural moisture measurement, the unit is highly flexible and allows non-destructive measurements to be performed.

Moreover, the surface temperature can be measured using an infrared sensor.

Particularly suited for interior fitting or parquet reclining contractors, or joiners.

MEASURING RANGES

- **WOOD MOISTURE**
4 to 30% (dry mass)
- **STRUCTURAL MOISTURE**
– Refer to the overview on page 29 –
- **TEMPERATURE**
Infrared measuring range:
-20 to +199.9 °C using IR 40 EL



APPLICATION HB 30 together with an M 25-100 brush electrode pair

PROPERTIES

- Direct readout of wood moisture in % on the large LCD display, resolution: 0.1%
- 2-level wood species correction for more than 300 types of wood
- Housing: 140 [L] x 90 [W] x 42/50 mm [H]

ACCESSORIES INFO BOX

For packages, please refer to page 33.

	M 18	M 20	M 20-OF 15	M 20-HW 200/300									
	M 6	M 6-150/250	M 6-Bi 200/300	M 20	M 20-OF 15	M 20-Bi 200/300	M 21-100/250	M 25-100/300	MB 35	B 50	B 60	LB 70	
	IR 40 EL												



HYDROMETTE UNI 1

The UNI 1 is an electronic **multipurpose meter** for three measured values to which active electrodes for measuring structural moisture, air humidity, and temperature may be connected.

The following (active) electrodes may be connected:

- **B 50, B 60, LB 70** for non-destructive measurement and display of moisture in ceilings, walls, floors, or other building materials
- **MB 35** for concrete surface moisture measurement only
- **MH 34** for measuring *high moisture values* (40 to 200%) in coniferous wood only
- **IR 40 EL** for sensing surface temperature, thermal bridges, and dew point temperature
- **RF-T 28, RH-T 37 EL, RH-T 37 EL flex** for air humidity and air temperature measurement and
- all of our Pt100 temperature sensors

Particularly suited for air conditioning technicians, surveyors who evaluate damage caused by water, insurance companies, and as a supple-

ment for a wood moisture meter.

MEASURING RANGES

- **STRUCTURAL MOISTURE**
– Refer to the overview on page 29 –
 - **AIR HUMIDITY**
0 to 100% R.H. using RF-T 28, RH-T 37 EL, RH-T 37 EL flex
 - **TEMPERATURE**
-50 to +600 °C
depending on the Pt100 temperature sensor
Infrared measuring range:
-20 to +199.9 °C using IR 40 EL
- [WOOD MOISTURE]**
40 – 200% (dry mass) using MH 34]

PROPERTIES

- Quick measurement of moisture in set building materials using the capacitive radio frequency measuring technique
- The temperature measurement precision is achieved by Pt100 measuring resistors connected in 4-wire technology
- Housing: 140 [L] x 90 [W] x 42/50 mm [H]



For packages, please refer to page 33.

	MH 34																		
	MB 35	B 50	B 60	LB 70															
	RF-T 28	RH-T 37 EL 165/320	RH-T 37 EL flex 250/350																
	ET 10	TT 40	LT 20	TT 30	ET 50	OTW 90	OT 100	OTW 480	TT 480	TT 600	FT 2-30	IR 40 EL							



HYDROMETTE UNI 2



The UNI 2 is an electronic and **multipurpose meter** for three measured values to which active electrodes for measuring structural moisture, air humidity, and temperature may be connected. Additionally, all **structural moisture measuring electrodes** may be connected to the UNI 2 unit that are based on the **resistance principle of measurement**.

The following (active) electrodes may be connected: [Refer to page 31 »UNI 1«](#).

MEASURING RANGES

- **STRUCTURAL MOISTURE**
– Refer to the overview on page 29 –
- **AIR HUMIDITY**
0 to 100% R.H. using RF-T 28, RH-T 37 EL, RH-T 37 EL flex
- **TEMPERATURE**
-50 to +600 °C
depending on the Pt100 temperature sensor
Infrared measuring range:
-20 to +199.9 °C using IR 40 EL



APPLICATION

Measuring the structural moisture using the **UNI 2** unit and an **M 21-250** deep measuring electrode pair

[WOOD MOISTURE

40 – 200% (dry mass) using MH 34 on coniferous wood]

PROPERTIES

- Quick measurement of moisture in set building materials using the resistance-based and capacitive radio frequency measuring techniques
- The temperature measurement precision is achieved by Pt100 measuring resistors connected in 4-wire technology
- Housing: 140 [L] x 90 [W] x 42/50 mm [H]

ACCESSORIES INFO BOX

For packages, please refer to page 33.

	MH 34												
	M 6	M 6-150/250	M 6-Bi 200/300	M 20	M 20-OF 15	M 20-Bi 200/300	M 21-100/250	M 25-100/300	MB 35	B 50	B 60	LB 70	
	RF-T 28	RH-T 37 EL 165/320	RH-T 37 EL flex 250/350										
	ET 10	TT 40	LT 20	TT 30	ET 50	OTW 90	OT 100	OTW 480	TT 480	TT 600	FT 2-30	IR 40 EL	

CLASSIC-PACKAGES



Measuring task is supported by the Hydromette unit – the respective accessories are included in the package (short name below the symbol)



Measuring task is supported by the Hydromette unit – but this package does not include the respective accessories



Measuring task is not supported by the Hydromette unit



HB 30-PACKAGES

Page 30

<p>2511</p> <p>M 20</p>	<p>2512</p> <p>M 6</p>	<p>2505</p> <p>M 20 M 6</p>	<p>2506</p> <p>M 20 M 6, B 50</p>	<p>2450</p> <p>M 20 M 6, B 50 IR-40 EL KLIMA II, DIALOG D+</p>
-------------------------	------------------------	---------------------------------	---------------------------------------	--

UNI 1-PACKAGES

Page 31

<p>2436</p> <p>B 50</p>	<p>2432</p> <p>B 60</p>	<p>2438</p> <p>MB 35</p>	<p>2431</p> <p>B 60 RF-T 28 IR-40 EL</p>
-------------------------	-------------------------	--------------------------	--

UNI 2-PACKAGES

Page 32

<p>2550</p> <p>M 6</p>	<p>2553</p> <p>M 6, B 50</p>	<p>2552</p> <p>M 6, B 50 RF-T 28</p>	<p>2551</p> <p>M 6, B 60 RF-T 28 IR-40 EL</p>
------------------------	------------------------------	--	---

RTU 600-PACKAGES

Page 34

<p>2670</p> <p>M 20</p>	<p>2675</p> <p>M 18</p>	<p>2680</p> <p>M 20 RF-T 28</p>	<p>2685</p> <p>M 18 RF-T 28</p>	<p>2681</p> <p>M 20 M 6 RF-T 28</p>	<p>2682</p> <p>M 20 M 21-100, B 60 RF-T 28</p>	<p>2683</p> <p>M 20 M 21-100, B 60 RF-T 28 IR-40 EL</p>
-------------------------	-------------------------	-------------------------------------	-------------------------------------	---	--	---

M 4050-PACKAGES

Page 35

<p>2400</p> <p>M 20 RF-T 28</p>	<p>2406</p> <p>M 20 M 21-100 RF-T 28</p>	<p>2407</p> <p>M 20 M 21-100, B 60 RF-T 28</p>	<p>2408</p> <p>M 20 M 21-100, B 60 RF-T 28 IR-40 EL</p>	<p>2409</p> <p>M 20 M 21-100, B 60 RF-T 28 IR-40 EL DIALOG M+</p>
-------------------------------------	--	--	---	---



2408



HYDROMETTE RTU 600



The RTU 600 unit is a **combined** electronic **multi-purpose meter** for sensing four values (wood moisture, structural moisture, air humidity, and temperature) that is equipped with **universal wood species correction** for each type of wood and with automatic **temperature compensation**. The **versatile** Hydromette unit allows a large number of (active) electrodes ([refer to page 31 »UNI 1«](#)) to be connected as well as all resistance-based wood or structural moisture electrodes to be used with the unit. Particularly suited for painting, interior fitting or parquet reclining contractors, parquet factories, wood-processing companies, industrial wood drying processes, construction companies, architects, surveyors, residential building construction companies, and municipal building departments.

MEASURING RANGES

- **WOOD MOISTURE**
4 – 100% (dry mass) for resistance-based measuring techniques
40 – 200% (dry mass) using MH 34 in coniferous wood

- **STRUCTURAL MOISTURE**

– Refer to the overview on page 29 –

- **AIR HUMIDITY**

0 to 100% R.H. using RF-T 28, RH-T 37 EL, RH-T 37 EL flex

- **TEMPERATURE**

-50 to +600 °C
depending on the Pt100 temperature sensor
Infrared measuring range:
-20 to +199.9 °C using IR 40 EL

PROPERTIES

- 81-level wood species correction
- Automatic wood temperature compensation from -10 to +90 °C
- Quick moisture measurement in set building materials
- The temperature measurement precision is achieved by Pt100 measuring resistors connected in 4-wire technology
- Housing: 180 [L] x 115 [W] x 53 mm [H]

ACCESSORIES INFO BOX

	M 18	M 20	M 20-OF 15	M 20-HW 200/300	MH 34								
	HS 500	HS-i 500	HS 1000	HS-i 1000	HST 1000	HST-i 1000	HST-i 1000/S 250						
	M 6	M 6-150/250	M 6-Bi 200/300	M 20	M 20-OF 15	M 20-Bi 200/300	M 21-100/250	M 25-100/300	MB 35	B 50	B 60	LB 70	
	RF-T 28	RH-T 37 EL 165/320	RH-T 37 EL flex 250/350										
	ET 10	TT 40	LT 20	TT 30	ET 50	OTW 90	OT 100	OTW 480	TT 480	TT 600	FT 2-30	IR 40 EL	



HYDROMETTE M 4050

The M 4050 unit is an electronic **structural and wood moisture, air humidity, and temperature meter** that is based on microprocessor technology and provides **data storage** as well as connectivity to a PC or printer. The Hydromette unit may be used to quickly and precisely perform resistance or dielectric constant based measurements. Thanks to the stored characteristic curves, the **measured values** are directly displayed **in wt.-% or CM-%**. The **versatile unit** allows a large number of (active) electrodes (refer to page 31 »UNI 1«) to be connected as well as all resistance-based wood or structural moisture electrodes to be used with the unit.

MEASURING RANGES

■ WOOD MOISTURE

- 4 to 100% (dry mass) for resistance-based measuring techniques
- 40 – 200% (dry mass) using MH 34 in coniferous wood

■ STRUCTURAL MOISTURE

– Refer to the overview on page 29 –

■ AIR HUMIDITY

0 to 100% R.H. using RF-T 28, RH-T 37 EL, RH-T 37 EL flex

■ TEMPERATURE

-30 to +170 °C
depending on the Pt100 temperature sensor
Infrared measuring range:
0 to +169.9 °C using IR 40 EL

PROPERTIES

- Measured value storage of 3,000 wood moisture and temperature values including date and time
- Statistical evaluation of the measured values for minimum, maximum, mean values as well as standard deviation
- Individual characteristic curves for 250 types of wood and for more than 20 types of building material
- Fully automated temperature compensation of the wood moisture measured values
- Special calibration for the glued laminated timber industry
- Housing: 190 [L] x 115 [W] x 56 mm [H]



	M 18	M 20	M 20-OF 15	M 20-HW 200/300	MH 34								
	HS 500	HS-i 500	HS 1000	HS-i 1000	HST 1000	HST-i 1000	HST-i 1000/S 250						
	M 6	M 6-150/250	M 6-Bi 200/300	M 20	M 20-OF 15	M 20-Bi 200/300	M 21-100/250	M 25-100/300	MB 35	B 50	B 60	LB 70	
	RF-T 28	RH-T 37 EL 165/320	RH-T 37 EL flex 250/350										
	ET 10	TT 40	LT 20	TT 30	ET 50	OTW 90	OT 100	OTW 480	TT 480	TT 600	FT 2-30	IR 40 EL	

OUR PRACTICAL CM SERIES METERS

- Particularly compact pressure cylinder
- Specially shaped cylinder bottom
- Variable sealing system
- Small sample quantity (e.g. 20/50 g)



The CM-B Pro (order code 2910) and CM-P Pro units (order code 2920) are compatible with DIN standard.

Compliant with DIN
18560-4:2012-06



HYDROMAT

CM-B STANDARD | CM-B PRO

Compliant with DIN
18560-4:2012-06 standard

The CM-B-Standard and CM-B Pro case sets include meters for determining **moisture in set building materials** and several other materials using the **Calcium Carbide Method**. Beyond electrical measurements, this measuring technique has been known in the industry for years and several professional associations recommend using it for a number of measuring tasks. Using the case sets is easy. All measurements can be performed directly on the object using the tools included in the case and thus quickly allow to obtain information on the particular moisture condition. The decision on whether screed may be laid or a wall may be finished can immediately be made.

Particularly suited for parquet reclining or floor tiling contractors, construction companies, architects, or surveyors.

MEASURING RANGE

■ STRUCTURAL MOISTURE

0.30 to 7.50 CM-% using gauge readout

0.14 to 22.90 CM-% using conversion table



The information on the contents of the case sets is found on our website or in the price list.

ACCESSORIES & REPLACEMENT PARTS FOR CM UNITS



BASE GAUGE 3603

- Measuring range 0 to 2.5 bar, class 1.6
- Bourdon gauge, housing: Plastic

PREMIUM GAUGE 3604

- Measuring range 0 to 2.5 bar, class 1.0
- Bourdon gauge, housing: Stainless steel

DIGITAL TIMER (not shown) 3648

- For time recording during CM measurements

ELECTRONIC SCALES 3642

- LCD display and battery operation
- Weighing range up to 500 g, resolution 0.1 g

MANUAL PESTLE 3630

- For quick and moisture content keeping sample preparation in the CM bottle, including sealing

TEST WEIGHTS (not shown)

- For testing our scales
- Test weight M 1–20 (20 g) 3645
- Test weight M 2–100 (100 g) 3643

STAINLESS STEEL BALLS 3615

- Replacement ball pack containing 3 balls

CALCIUM CARBIDE CA 7 VIALS


- Refill pack containing 20 vials 3620
- Refill pack containing 100 vials 3621

TEST WATER VIALS 3626

- 10 vials of 0.7 ml test water each
- For testing tightness of the pressure cylinder and operability of the gauge

PE BAGS (not shown) 3649

- Refill pack of 100 bags

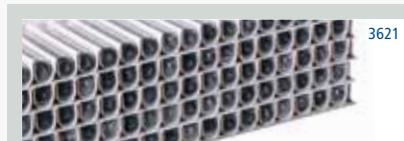

Pressure cylinder with manual pestle fitted

OUR DATA LOGGERS

- Portable, handy storage units
- Including interface for data transfer to a PC and for programming the data logger
- Storage capacity: 2,000 measured values per channel, including date/time
- Measuring cycle: 5 secs to 6 hrs, software set
- MIN, MAX limit features
- Power supply: Durable lithium battery
- Optional: DIALOG D+ software package
- 200 [L] x 35 [W] x 35 mm [H]





Klima I | Klima II | Klima II-KT

DATA LOGGERS

KLIMA I & KLIMA II DATA LOGGERS

The KLIMA I and KLIMA II data loggers are **mobile storage units** for recording temperature and air humidity data and are specifically designed to be used for **long-term monitoring**. The data loggers are ideally suited for tracking the climate in residential or working rooms, museums, or warehouses.

MEASURING RANGES

- **AIR HUMIDITY**
15 to 98% R.H.
- **TEMPERATURE**
-5 to +60 °C

KLIMA I 9700

KLIMA II 9720

- Including LCD display for reading instantaneous values

KLIMA II-KT DATA LOGGER 9721

The Klima KT-II unit is **specifically** suited for measuring, monitoring, and recording **core or material temperatures**. For instance, **heat treatment** of wooden packing/pallets or Sirex drying processes can be documented this way. The FT 10 flexible temperature sensor cable comes with the data logger. This cable is connected to the logger and used to measure the material temperature.

MEASURING RANGE

- **TEMPERATURE**
-5 to +80 °C (at the sensor tip of the temperature sensor cable)

PROPERTIES

- Including LCD display
- The compatible FT 10 temperature sensor (length: 10 m) is Teflon sheathed.



9700



9720



9721

ACCESSORIES FOR WOOD MOISTURE



Electrode pairs to be used in conjunction with an M 20 electrode only



M 20 | M 18 ELECTRODES



M 20 DRIVE-IN ELECTRODE 3300

- For resistance-based wood moisture measurement
- Material: Impact-proof plastic
- Including 10 electrode pins each, 16/23 mm [L]
- For moisture measurement in wood of up to 50 mm in thickness

M 20-DS 16 CONVERSION KIT 4310

- For moisture measurement in wood of up to 30 mm in thickness using particularly slim pins (1.6 mm [Ø])
- Hardly visible punctures in the material (e.g. in mopboards or veneer)

M 20-OF 15 SURFACE MEASURING CAP PAIR 4315

- Moisture measurements on surfaces and veneers without damaging the material to be measured
- Operating depth approx. 2 to 5 mm

M 18 RAM-IN ELECTRODE 3500

- For resistance-based wood moisture measurement
- Material: Corrosion-resistant stainless steel as well as special plastic
- Including 10 electrode pins each, 40/60 mm [L]
- For moisture measurement in thick wood (up to 180 mm) and in hardwood



Optional:
Teflon insulated
electrode pins
(refer to page 73)



PRODUCT INFO BOX

H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050



M 20-HW STICK-IN ELECTRODE PIN PAIR MH 34 ACTIVE ELECTRODE



VIEW of M 20-HW electrode pin pair of 200 mm or 300 mm in length

ORDER CODE 4350/4355



M 20-HW 200/300 STICK-IN ELECTRODE PIN PAIR

- For measurement in chips, wood wool, veneer stacks, and bulk materials
- Non-isolated pins
- 200 mm [L] x 4 mm [Ø] 4350
- 300 mm [L] x 4 mm [Ø] 4355
- To be used only in conjunction with an M 20 electrode

MH 34 ACTIVE ELECTRODE 3370

Special probe for high moisture values, suited for forestry and saw mill industry

- Built-in electronics for sensing high wood moisture values in coniferous wood
- Specifically designed to be used for wet storage and for pre-sorting freshly sawn timber for industrial wood drying
- Wood moisture: 40 to 200% (dry mass)
- Not suited for hardwood



PRODUCT INFO BOX

MH 34 active electrode to be used in conjunction with the following units:

H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050

ACCESSORIES FOR BULK MATERIALS





PUSH-IN ELECTRODES HS



HS PUSH-IN ELECTRODES

- For measuring the material moisture in bulk materials (wood chips, planing chips etc.)
- Including compression plate

HS 500 ⁴³⁷⁵

- Penetration depth approx. 500 mm

HS-i 500 ⁴³⁸⁵


- Including 100 mm long insulating sleeves to prevent surface moisture from skewing the measuring result
- Penetration depth approx. 500 mm

HS 1000 ⁴³⁹⁰

- Penetration depth approx. 870 mm

HS-i 1000 ⁴³⁹⁵

- Including 150 mm long insulating sleeves to prevent surface moisture from skewing the measuring result
- Penetration depth approx. 870 mm

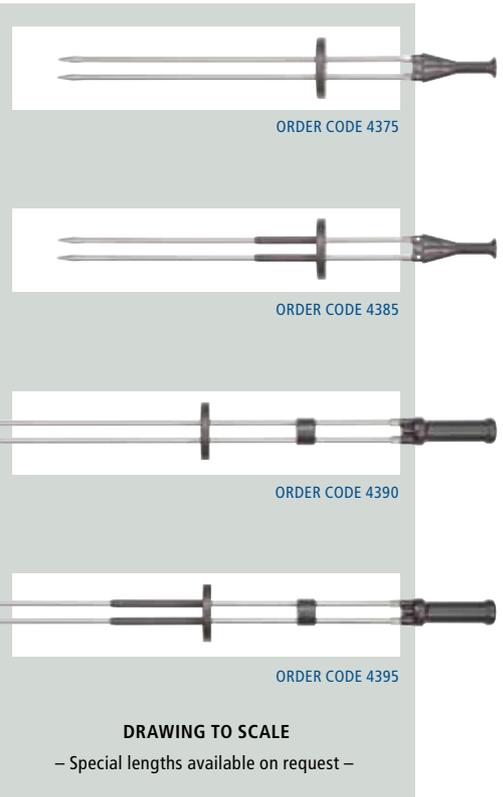

DRAWING TO SCALE

– Special lengths available on request –

PRODUCT INFO BOX

H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050



PUSH-IN ELECTRODES HST

HST PUSH-IN ELECTRODES

- For measuring the material moisture in bulk materials (wood chips, planing chips etc.)
- Including compression plate
- Penetration depth approx. 830 mm

HST 1000 4370

- Temperature measurement using built-in Pt100 sensor from -20 to +80 °C

HST-i 1000 4380

- Including 150 mm long insulating sleeves to

prevent surface moisture from skewing the measuring result

- Temperature measurement using built-in Pt100 sensor from -20 to +80 °C

HST-i 1000/S 250 4381

- Including 250 mm long insulating sleeves to prevent surface moisture from skewing the measuring result
- Temperature measurement using built-in Pt100 sensor from -20 to +80 °C



ORDER CODE 4370



ORDER CODE 4380



ORDER CODE 4381



H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050

ACCESORIES FOR STRUCTURAL MOISTURE



YOUR SUCCESS THROUGH OUR PRECISION



B 50 | B 60 | LB 70 ACTIVE ELECTRODES

B 50 ACTIVE ELECTRODE 3750

- For capacitive radio frequency based structural moisture measurement
- Built-in electronics for **non-destructively sensing** moisture in all types of building materials
- For detecting the **moisture distribution** in ceilings, walls, screeds, and other set building materials
- High penetration of up to 120 mm (depending on material density)

B 60 ACTIVE ELECTRODE 3760

- Same as B 50, except for additional built-in **limit adjuster** from 20 to 140 digits and beeper

LB 70 ACTIVE ELECTRODE 3755

- Same as B 50, except for additional **extendable telescopic probe**:
 - > Hardly accessible locations can be reached without ladder or stooping down
 - > Quick and convenient scanning of large surfaces and components
- Length: 80 to 120 cm

MEASURING RANGES

- 0 to 199 digits (scanning mode), moisture qualification using the table
- 0.3 to 8.5 wt.-%
Depending on the building material, conversion by means of the table
- 0.3 to 6.5 CM-%
Depending on the building material, conversion by means of the table



PRODUCT INFO BOX

H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050



M 20 ELECTRODE

MB 35 ACTIVE ELECTRODE

M 20 DRIVE-IN ELECTRODE 3300

- For resistance-based structural material moisture measurement
- Material: Impact-proof plastic
- Including 10 electrode pins each, 16/23 mm [L]
- For moisture measurements in soft, set building materials (e.g. plaster, gypsum, or aerated concrete)
- For deep measurements in aerated concrete etc. up to 70 mm, also electrode pins of 60 mm length (order code 4660) may be used

M 20-OF 15 SURFACE MEASURING CAP PAIR 4315

- For moisture measurements on surfaces without damaging the material to be measured, to be used in conjunction with the M 20 electrode
- Operating depth approx. 2 to 5 mm

MB 35 ACTIVE ELECTRODE 3770

- Special probe with built-in electronics for sensing near-surface moisture in *concrete*
- For pre-testing before applying coatings or adhesives
- Depth of penetration approx. 2 to 5 mm
- To be used in the moisture range from 2 to 8 wt.-% (oven-dry test)



Electrodes to be used in conjunction with the following units:

M 20	H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
	HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050
MB 35	H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
	HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050



M 25 BRUSH ELECTRODE PAIR



APPLICATION The brush electrodes are put into the pre-drilled hole

- For structural moisture measurement in hard or soft building materials
- Easily create moisture profiles by performing measurements in layers
- Including convenient turning aid for inserting and removing
- No additional contact agent required
- Insulated stem to prevent surface moisture from skewing the measuring result

M 25-100 BRUSH ELECTRODE PAIR [3740](#)

- To be used up to 100 mm [D], sampling holes to be drilled with Ø 6 mm drill bit

M 25-300 BRUSH ELECTRODE PAIR [3743](#)

- To be used up to 300 mm [D], sampling holes to be drilled with Ø 6 mm drill bit




PRODUCT INFO BOX

H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
HB 30	BLE	UNI 1	UNI 2	RTU 600	M 4050



M 21

ELECTRODE PAIR FOR DEEP MEASUREMENT

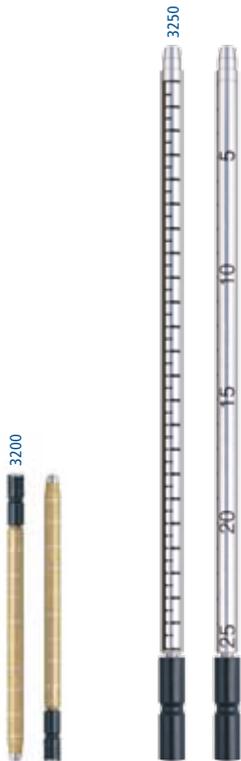

- For structural moisture measurements, especially for deep measurements in building materials together with contact paste [5400]
- Create moisture profiles by performing measurements in layers
- Including scale for indicating the measuring depth
- Insulated stem to prevent surface moisture from skewing the measuring result

M 21-100 ELECTRODE PAIR FOR DEEP MEASUREMENT 3200

- To be used up to 100 mm [D], sampling holes to be drilled with Ø 8 mm drill bit

M 21-250 ELECTRODE PAIR FOR DEEP MEASUREMENT

- To be used up to 250 mm [D], sampling holes to be drilled with Ø 10 mm drill bit



DETAIL Both electrode pairs are equipped with one-centimetre division scale

PRODUCT INFO BOX

H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050



M 6 STICK-IN ELECTRODE PAIR

M 6-Bi 200/300 FLAT ELECTRODE PAIR



APPLICATION TIP Ideal electrode clearance: 10 cm



Flat electrodes to be used in conjunction with M 6 electrodes

M 6 STICK-IN ELECTRODE PAIR 3700

- For measuring hard, set building materials (concrete, screeds etc.) together with contact paste [5400]
- Including 10 replacement pins each, 40/60 mm [L]
- Electrode heads are used as carrier system for various other electrode pairs:
 - > M 6-Bi 200/300
 - > M 20-Bi 200/300 (p. 54)
 - > M 6-150/250 (p. 54)

M 6-Bi 200/300 FLAT ELECTRODE PAIR

- For moisture measurement in screed or insulating materials, particularly in edge or floating joints
- Insulated stem to prevent surface moisture from skewing the measuring result
- 10 [L] x 0.8 [W] x 200 mm [H] 3702
- 10 [L] x 0.8 [W] x 300 mm [H] 3703
- For use, one M 6 electrode pair is required



M 6 stick-in electrodes to be used in conjunction with the following units:

H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
HB 30	BLE	UNI 1	UNI 2	RTU 600	M 4050



M 6-150 / 250 | M 20-Bi STICK-IN ELECTRODE PIN PAIRS



M 6-150/250 STICK-IN ELECTRODE PINS

- Extra slim probes for moisture measurement in building or insulating materials using floating joint/spacer cross
- Non-insulated
- For use, one M 6 electrode pair or one M 20 electrode is required
- 150 mm [L] x 3 mm [Ø] 3706
- 250 mm [L] x 2 mm [Ø] 3707

M 20-BI 200/300 STICK-IN ELECTRODE PINS

- For deep measurement in insulations, roofs, and soft set building materials
- Insulated stem to prevent surface moisture from skewing the measuring result
- 200 mm [L] x 4 mm [Ø] 4360
- 300 mm [L] x 4 mm [Ø] 4365
- For use, one M 6 electrode pair or one M 20 electrode is required



APPLICATION

Measurements in the spacer cross using the M 6-150/250 stick-in electrode tip pair



ACCESSORIES FOR AIR HUMIDITY



DESIGNED FOR REAL-WORLD APPLICATIONS



RF-T 28

ACTIVE ELECTRODE

RF-T 28 ACTIVE ELECTRODE 3155

- Probe for measuring the climate (air humidity and temperature) within seconds
- Fast response speed of the sensor allows for detecting leakages (e.g. clearance between doorframe and door leaf or window)
- Excellent long-term stability of the sensor

MEASURING RANGES

- **AIR HUMIDITY**
0 to 100% R.H.
 $\pm 2.0\%$ R.H. (15 to 85% R.H.) (*)
- **TEMPERATURE**
-10 to +80 °C
 ± 0.3 °C (0 to +80 °C) (*)
(*) = sensor accuracy



VIEW Filter cap

ORDER CODE 3156

FILTER CAP FOR RF-T 28 3156

- Made of sintered bronze
- For protection against air containing dust, pollution as well as for measuring at high air flow velocities



PRODUCT INFO BOX

H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050



RH-T 37 EL 160/320

ACTIVE ELECTRODE



VIEW of the ergonomically shaped handle of the RH-T 37 (side view)

ORDER CODE 3140

RH-T 37 EL ACTIVE ELECTRODE

- Special probe for air humidity and temperature measurement, particularly suited for measurements in bulk materials and solid materials (e.g. brickwork or screeds)
- Slim sensor pipe
- For humidity analyses, damage survey, drying of buildings, checking whether floor or wall covers may be laid, measurements in joints
- Diaphragm filter (for air containing dust, pollution, or high air flow velocity) is standard equipment

MEASURING RANGES


- **AIR HUMIDITY**
0 to 100% R.H.
±1.8% R.H. (10 to 90% R.H.) (*)
 - **TEMPERATURE**
-20 to +70 °C
±0.5 °C (-10 to +70 °C) (*)
- (*) = sensor accuracy

RH-T 37 EL 160 ACTIVE ELECTRODE 3140

- Sensor pipe: 165 [L] x 5.5 mm [Ø]

RH-T 37 EL 320 ACTIVE ELECTRODE 3141

- Sensor pipe: 320 [L] x 5.5 mm [Ø]

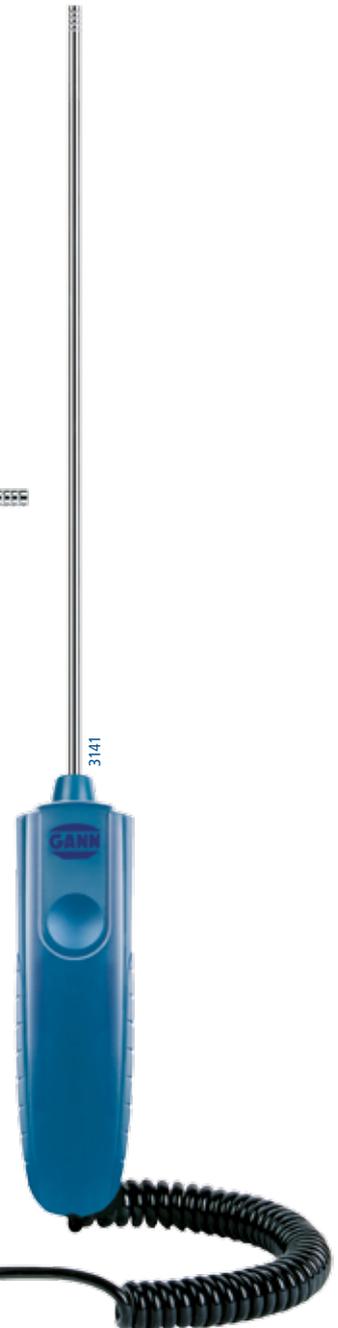

H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050



RH-T 37 EL FLEX 250 / 350 ACTIVE ELECTRODE

Active electrode with bent gooseneck

RH-T 37 EL FLEX ACTIVE ELECTRODE

- Special probe for air humidity and temperature measurement, particularly suited for measurements in bulk materials and solid materials (e.g. brickwork or screeds)
- Slim flexible sensor pipe («gooseneck») for measuring locations that are difficult to access
- For humidity analyses, damage survey, drying of buildings, checking whether floor or wall covers may be laid, measurements in joints
- The Hydromette *M 4050* can be used to measure air humidity in a drill hole and *sorption isotherms* can be used to determine the moisture content of certain set building materials or whether coatings can be applied to these building materials

- Diaphragm filter (for air containing dust, pollution, or high air flow velocity) is standard equipment

MEASURING RANGES

- **AIR HUMIDITY**
0 to 100% R.H.
±1.8% R.H. (10 to 90% R.H.) (*)
 - **TEMPERATURE**
-20 to +70 °C
±0.5 °C (-10 to +70 °C) (*)
- (*) = sensor accuracy

RH-T 37 EL FLEX 250 ACTIVE ELECTRODE 3142

- Sensor pipe (gooseneck):
250 [L] x 6.5 mm [Ø]

RH-T 37 EL FLEX 350 ACTIVE ELECTRODE 3143

- Sensor pipe (gooseneck):
350 [L] x 6.5 mm [Ø]

PRODUCT INFO BOX

H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050

3143

3142

ACCESSORIES FOR TEMPERATURE





IR 40 EL / BL ACTIVE ELECTRODE



DETAIL VIEW

Built-in
laser pointer
of the IR 40 EL/
BL unit



INFRARED SURFACE TEMPERATURE SENSOR

- Infrared sensor for non-contact surface temperature measurements
- Particularly suited for objects having a low thermal capacity (wood, glass, insulating materials)
- Ideal sensor for detecting thermal bridges, determining the dew point temperature, measuring live, moving or vibrating parts as well as for locating heating pipes or coils
- Built-in laser pointer for identifying the measuring spot
- 6:1 optical system
- Fixed emissivity: 0.95

■ TEMPERATURE

Infrared measuring range:

IR 40 EL 3150

- -20 to +199.9 °C
(when using the Hydromette M 4050 unit:
0 to +169.9 °C
±0.5 °C (0 to 60 °C), at ambient temperature
0 to 50 °C (*))

IR 40 BL 13150

- -40 to +380 °C
±0.5 °C (0 to 60 °C), at ambient temperature
0 to 50 °C (*))

(*)) = sensor accuracy

IR 40 EL		H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
		HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050
IR 40 BL		H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
		HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050



TF-IR BL ACTIVE ELECTRODE

The **TF-IR BL active electrode** is a combined electrode that can be used to simultaneously perform climate measurements (air humidity and temperature) and infrared surface temperature measurements.

This combination of the different measuring techniques enables the TF-IR BL unit to be used for quickly and reliably assessing dew point undershoots or determining borderline conditions on surfaces such as walls, ceilings, floors as well as on window or door lintels.

When using the unit in due time mould formation (fungal growth) may be prevented and occurrence of moistening caused by condensation may be assessed reliably.

MEASURING RANGES

■ AIR HUMIDITY

0 to 100% R.H.

±2% R.H. (20 to 80% R.H.) (*)

■ TEMPERATURE

Air temperature: -20 to +70 °C

±0.5 °C (-10 to +60 °C) (*)

Infrared measuring range:

-40 to +380 °C

± 0.5 °C (0 to 60 °C), at

0 to 50 °C ambient temperature (*)

(*) = sensor accuracy

■ Built-in audible interval signal:

The more the surface temperature is approaching the dew point temperature, the more the signal will change from intermittent to continuous sound.

■ Built-in laser pointer for identifying the measuring spot

■ Fixed emissivity: 0.95

■ Automatic calculation of dew point temperature, equilibrium wood moisture content (EMC) as well as air absolute humidity read-out in g/m³





PT100 SENSORS BL TEMPERATURE SENSORS



DETAIL VIEW

The ceramic tip of the OT 100 BL sensor is **suspended**

ORDER CODE 13170

- Pt100 sensor in 4-wire technology
- Built-in microprocessor

ET 10 BL PUSH-IN TEMPERATURE SENSOR

13165

- Rugged push-in sensor for measurements in solids, bulk materials, liquids
- Sensor pipe: 100 mm [L], 3 mm [Ø]
- **MEASURING RANGE** -50 to +250 °C

OT 100 BL SURFACE TEMPERATURE SENSORS 13170

- Suspended sensor tip with thermal separation and resulting optimised measured value collection, e.g. on wall surfaces

- Optional: thermally conductive paste [refer to page 74]
- Sensor pipe: 110 mm [L], 5 mm [Ø]
- **MEASURING RANGE** -50 to +250 °C

TT 40 BL IMMERSION AND FLUE GAS TEMPERATURE SENSOR 13180

- Rugged immersion and flue gas sensor for temperature measurement in liquids or pasty materials, e.g. glue, hot-melt adhesive or in asphalt or tar
- Sensor pipe: 380 mm [L], 5 mm [Ø]
- **MEASURING RANGE** -50 to +350 °C



PRODUCT INFO BOX

H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050



PT100 SENSORS

CLASSIC TEMPERATURE SENSORS

- Pt100 sensor in 4-wire technology

ET 10 PUSH-IN TEMPERATURE SENSOR

3165

- Rugged push-in sensor for measurements in solids, bulk materials, liquids
- Sensor pipe: 100 mm [L], 3 mm [Ø]
- **MEASURING RANGE** -50 to +250 °C

OT 100 SURFACE TEMPERATURE SENSOR

3170

- Suspended sensor tip with thermal separation and resulting optimised measured value collection, e.g. on wall surfaces
- Optional: thermally conductive paste [refer to page 74]
- Sensor pipe: 110 mm [L], 5 mm [Ø]
- **MEASURING RANGE** -50 to +250 °C

LT 20 AIR/GAS TEMPERATURE SENSOR 3190

- Fast air/flue gas sensor with slotted openings in the sensing area which allow the sensor to quickly respond to changes of the

ambient conditions

- Sensor pipe: 480 mm [L], 5 mm [Ø]
- **MEASURING RANGE** -20 to +200 °C

ET 50 PUSH-IN TEMPERATURE SENSOR 3160

- For fast measurements in soft solids, bulk materials, liquids
- Sensor pipe: 120 mm [L], 3.0/2.3 mm [Ø] (tip)
- **MEASURING RANGE** -50 to +300 °C





PT100 SENSORS

CLASSIC TEMPERATURE SENSORS



- Pt100 sensor in 4-wire technology

SURFACE TEMPERATURE SENSORS

- Angled special surface sensor, e.g. for veneer presses

OTW 90 3175

- Sensor pipe: 100 mm [L], 5 mm [Ø]

- **MEASURING RANGE** -50 to +250 °C

OTW 480 3176

- Sensor pipe: 480 mm [L], 5 mm [Ø]

- **MEASURING RANGE** -50 to +600 °C

IMMERSION AND FLUE GAS TEMPERATURE SENSORS

- Rugged immersion and flue gas sensor for temperature measurement in liquids or pasty materials, e.g. glue, hot-melt adhesive or in asphalt or tar

TT 30 3185

- Sensor pipe: 230 mm [L], 3 mm [Ø]

- **MEASURING RANGE** -50 to +350 °C

TT 40 3180

- Sensor pipe: 480 mm [L], 5 mm [Ø]

- **MEASURING RANGE** -50 to +350 °C

TT 480 3181

- Sensor pipe: 480 mm [L], 5 mm [Ø]

- **MEASURING RANGE** -50 to +600 °C

TT 600 3182

- Sensor pipe: 600 mm [L], 5 mm [Ø]

- **MEASURING RANGE** -50 to +600 °C



DETAIL VIEW

Different geometries of the measuring heads

H 35	BL H 40	HT 65	BL HT 70	HT 85 T*	M 2050 *
HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050

* = only up to +200 °C



FLEXIBLE TEMPERATURE SENSORS

For measuring the core temperature of various materials e.g. wood, building materials, and bulk materials. The measuring cable is Teflon sheathed and thus resistant to high temperatures. Additionally, the different cable lengths available increase versatility. So measurements in wood drying kilns (Sirex or ISPM-15 drying) are easily done.

- The 7-pin connector can be used to connect the sensor to different Hydromette units
- Sensor approx. 5.2 mm [Ø]

- **MEASURING RANGE** -20 to +120 °C

FT 2 [3195](#)

- Including 2 m Teflon cable

FT 5 [3196](#)

- Including 5 m Teflon cable

FT 10 [3197](#)

- Including 10 m Teflon cable

FT 20 [3198](#)

- Including 20 m Teflon cable

FT 30 [3199](#)

- Including 30 m Teflon cable

VIEW

FT 2 temperature
sensor

[ORDER CODE 3195](#)



PRODUCT INFO BOX

H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050
HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050



CABLE & ADAPTER MEASURING & CONNECTING



MK 8 MEASURING CABLE 6210

- For connecting a resistance-based electrode to a meter
- 1 m [L]

MK 15 MEASURING CABLE 6710

- 7-pin connecting/extension cable
- 1 m [L]

MK 17 CONNECTING CABLE 6950

- 9/25-pin
- For connecting a serial interface printer

MK 19 CONNECTING CABLE 6900

- 9/9-pin
- For connecting the serial interface of a PC

MK 24 CONNECTING CABLE 6940

- For connecting a data logger to the serial interface of a PC

PC ADAPTER, 9/25-pin 6910

- To be used in conjunction with MK 19 for connecting to the serial interface of a PC

BNC ADAPTER 6050

- For connecting an electrode cable to a Hydromette unit
- Direct verification of the wood moisture measuring points in a drying kiln

USB/SERIAL CONVERTER CABLE 6088

- To be used in conjunction with MK 19 or MK 24 for connecting to the USB interface of a PC

	H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050	HB 30	BL E	UNI 1	UNI 2	RTU 600	M 4050	KLIMA
MK 8	•	•	•	•	•	•	•	•	•	•	•	•	•
MK 15									•	•	•	•	•
MK 17												•	
MK 19												•	
MK 24												•	•
PC Adapter												•	
BNC Adapter	•	•	•	•	•	•	•	•	•	•	•	•	•
Conv. Cable						•						•	•

TEST ADAPTER FOR HYDROMETTE UNITS



VIEW Test adapter for wood moisture



Test adapter for structural moisture

SENSORCHECK RF-T 28 5728

- Test and adjustment reference standard for different air humidity values (for RF-T 28 active electrode)
- Without test and adjustment liquid [refer to page 74]

WOOD MOISTURE TEST ADAPTER 6070

- For checking the wood moisture measuring

circuit of our Hydromette units

STRUCTURAL MOISTURE TEST ADAPTER 6071

- For checking the structural moisture measuring circuit of our Hydromette units

TEMPERATURE TEST ADAPTER 6072

- For checking the temperature measuring circuit of our Hydromette units

	H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050	HB 30	BLE	UNI 1	UNI 2	RTU 600	M 4050	
Test adapter	•	•	•	•	•	•	•	•			•	•	6070
Test adapter					•		•	•		•	•	•	6071
Test adapter					•	•			•	•	•	•	6072

CARRYING CASES

- Used to store/transport GANN Hydromette units and Hydromat CM units
- Equipped with specific inlays and paddings

CARRYING CASE I 5051

- For H 35/HT 65 Hydromette units with M 20 electrode
- 255 [L] x 210 [W] x 72 mm [H]

CARRYING CASE IV 5084

- For H 35/HT 65/HB 30/UNI 1/UNI 2 Hydromette units
- 380 [L] x 330 [W] x 85 mm [H]

CARRYING CASE V 5085

- For HT 85 T/RTU 600/M 2050/M 4050 Hydromette units
- 380 [L] x 330 [W] x 85 mm [H]

CARRYING CASE VI 15052

- For BL H 40/BL HT 70 Hydromette units with M 20 electrode
- 255 [L] x 210 [W] x 48 mm [H]

CARRYING CASE VII 15083

- For BL H 40/BL HT 70/BL E Hydromette units
- 380 [L] x 330 [W] x 85 mm [H]

PLASTIC BOX 15099

- For 1 GANN BlueLine unit without accessories
- 82 [L] x 270 [W] x 57 mm [H]


PLASTIC BOX II 15058

- For 2 GANN BlueLine units without accessories
- 156 [L] x 270 [W] x 57 mm [H]

CARRYING CASE P 5086

- For CM-B/CM-P Hydromat
- 500 [L] x 420 [W] x 125 mm [H]



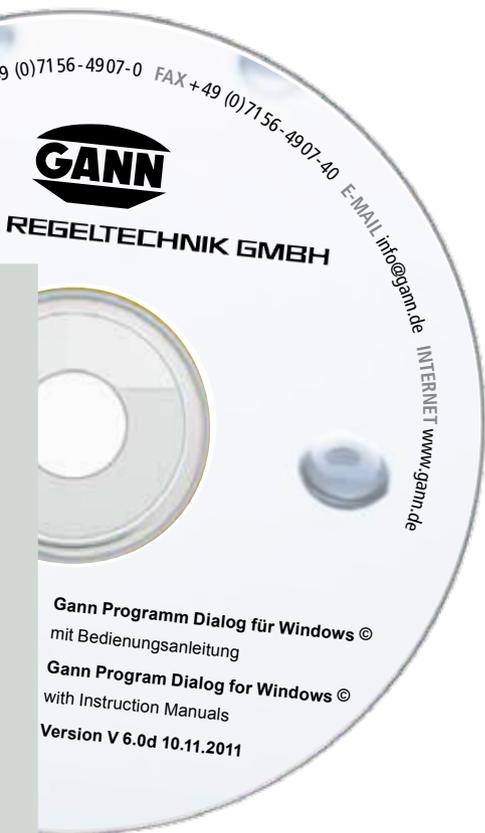

SOFTWARE DIALOG

DIALOG M+ SOFTWARE PACKAGE 6081

- Program for transferring the measured values from the M 2050/M 4050 Hydromette units to a PC
- For evaluation and printing
- Including manual, CD, and MK 19 connecting cable
- Compatible with MS Windows XP, Vista, 7

UPDATE FOR DIALOG M+ SOFTWARE 6086

- Update to the respective latest release
- Including manual and CD

DIALOG D+ SOFTWARE PACKAGE 6082

- Program for transferring the measured values from our data loggers to a PC
- Including manual, CD, and MK 24 connecting cable

- Compatible with MS Windows XP, Vista, 7

UPDATE FOR DIALOG D+ SOFTWARE 6087

- Update to the respective latest release
- Including manual and CD

DIALOG BL+ SOFTWARE PACKAGE 16083

- Application program for controlling various BL units
- Graphic and/or tabular measured value recording from up to four different sources
- Data export to MS Excel available
- To be used in conjunction with BL Compact IR/RH-T/TF 2/TF-IR
- Including manual, CD, and MK 26 connecting cable
- Compatible with MS Windows XP, Vista, 7

DATA LOGGERS

For associated data loggers, refer to page 41



OTHER ACCESSORIES



5833

VIEW The measuring points are particularly recommended for use with metallic or glossy surfaces



5150



5100

– Similar unit shown –

ANTISTATIC WRISTBAND 6075

- Flexible, with 1.5 m long grounding cable
- For discharging static electricity of the body

IR 30/E 95 MATTE BLACK LABEL 5833

- For all infrared-based measurements
- 30 mm [Ø]
- Emissivity of 95, for measuring e.g. metallic surfaces
- Quantity per pack: 50 pcs.

POWER SUPPLY 12 5150

- 230 V, 12 V = stabilised
- For M 2050/M 4050 Hydromette, recommended for longer data transfers to PC/printer


BATTERY CHARGER 5100

- Incl. battery
- Including charging indicator and reverse-polarity protection
- For all unit types




6075

– Similar unit shown –

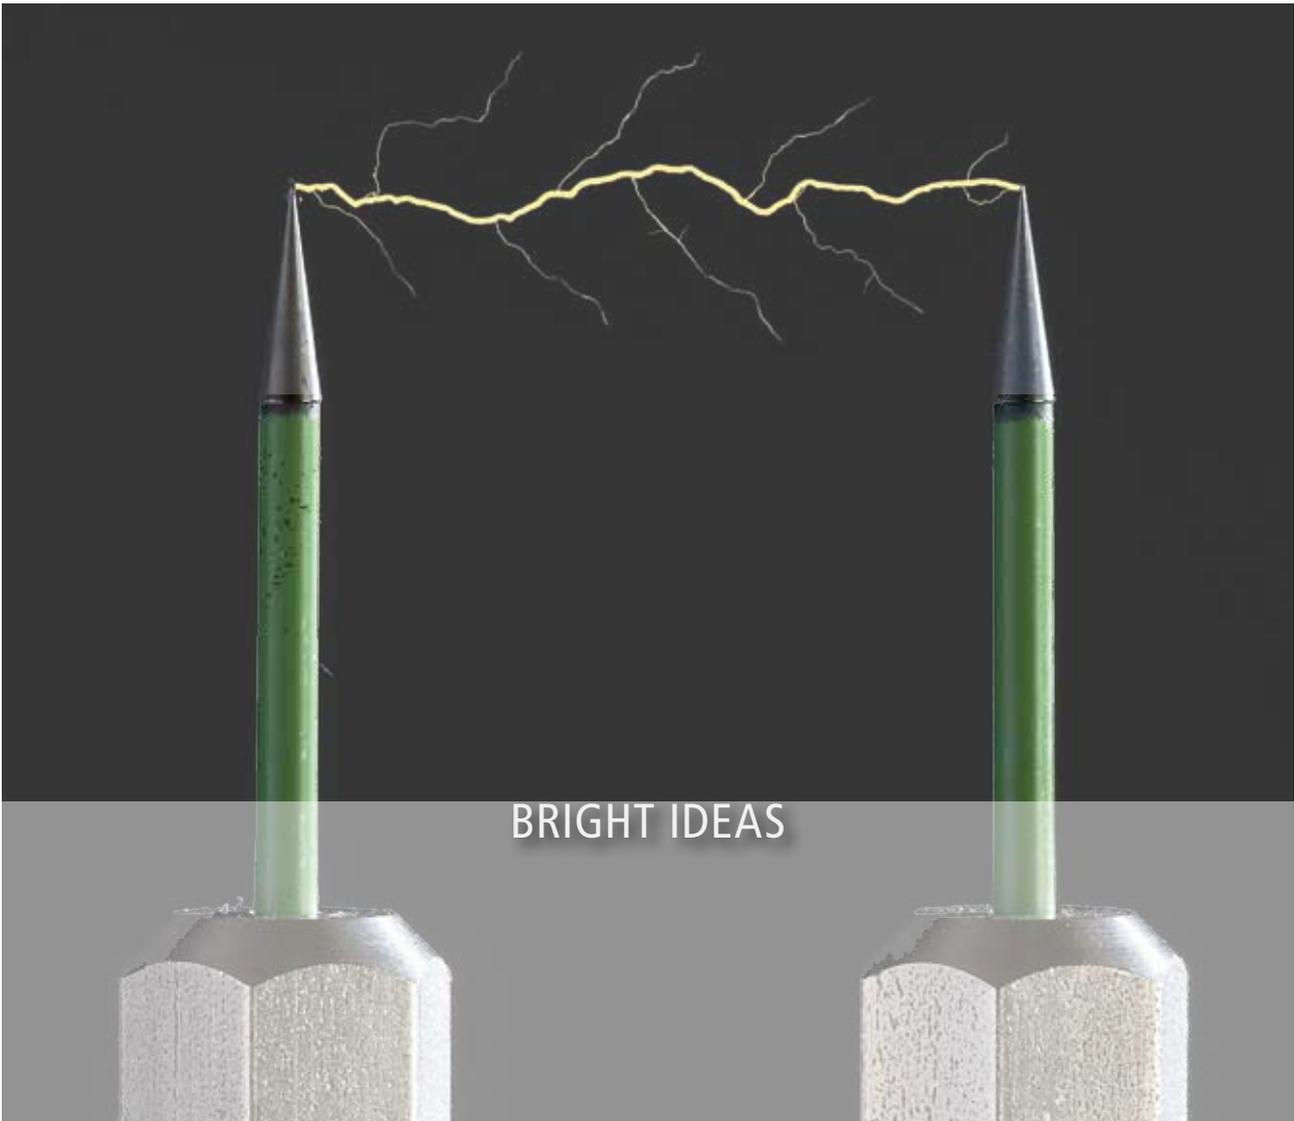

BRIGHT IDEAS

INSULATED | NON-INSULATED ELECTRODE PINS

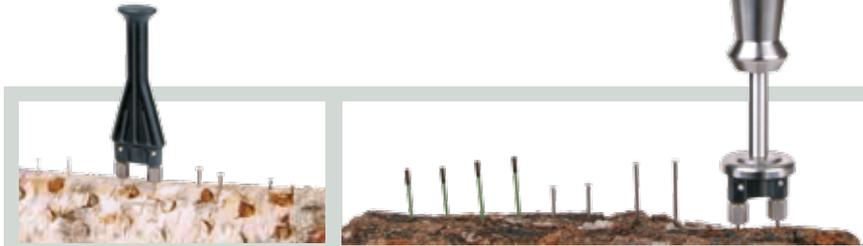

APPLICATION Overview over various pin length: Use in conjunction with M 20 [left-hand side] and M 18 [right-hand side] electrodes

ELECTRODE PINS WITH TEFLON INSULATION

- For layer or core humidity measurements
- The insulation prevents the measurement from being affected by surface moisture
- Since only the foremost part of the pins has no insulation, layer measurements may be performed as well.
- 2.5 mm [Ø]
- For M 18
- Quantity per pack: 10 pcs.
- 45 mm [L], max. penetration depth: 25 mm 4550
- 60 mm [L], max. penetration depth: 40 mm 4500

ELECTRODE PINS WITHOUT INSULATION

- Non-isolated electrode pins show the most humid location in the material cross-section.
- 2.5 mm [Ø]
- For M 6, M 18, and M 20
- Quantity per pack: 100 pcs.
- 16 mm [L], max. penetration depth: 10 mm 4610
- 23 mm [L], max. penetration depth: 17 mm 4620
- 40 mm [L], max. penetration depth: 34 mm 4640
- 60 mm [L], max. penetration depth: 54 mm 4660
- 20 mm [L], max. penetration depth: 8 mm 4600
- 1.6 mm [Ø]
- For (BL) Compact, (BL) Compact S, and M 20-DS 16 conversion kit
- Quantity per pack: 100 pcs.



OTHER CONSUMABLES

Sensorcheck – refer to page 67 –



TEST AND ADJUSTMENT LIQUID

- For RF-T 28
- To be used only in conjunction with a Sensorcheck
- Set consists of: 5 vials with fleece (sufficient for 5 test/adjustments)

SCF 30 5753

- For humidity range from 10 to 50% R.H.

SCF 70 5757

- For humidity range from 50 to 90% R.H.

SCF 90 5759

- For humidity range from 80 to 98% R.H.



CONTACT PASTE 5400

- For measuring **hard and set building materials** (e.g. screed, concrete) which have to be drilled
- In conjunction with **M 6** and **M 21** electrodes



THERMALLY CONDUCTIVE PASTE 5500

- For **improving heat transfer** on rough surfaces or in case of contact problems
- Recommended to be used for all contact-based temperature measurements, particularly for OT 100 (BL) and OTW 90/480

MEASURING ACCURACY



ABOUT MEASURING ACCURACY

Assessing the accuracy of a meter or of a measuring process requires considerable knowledge and expertise. The following description and information is to assist you as the user in practice.

It is intended to help you to better get through the maze of terms and to better assess your measurements. For this, it is necessary to subdivide the term of "accuracy" into the individual portions.

The accuracy/precision of the measurement essentially depends on the following elements:

■ MEASURING CIRCUIT/BOARD AND COMPONENTS USED

The quality design of the electrical circuit and the board layout are some of the most important prerequisites to achieve the highest possible basic accuracy.

Shielding against external impact (electrostatics, radio-frequency irradiation etc) as well as a reliable temperature compensation are indispensable requirements.

High-quality and narrow-tolerance components are indispensable as well, e.g. an A/D converter (for converting analogue to digital signals) having 16 bit resolution is 256 times better than a comparable 8 bit resolution A/D converter.

■ BASIC ACCURACY OF THE METER

It is based on the circuit, precision of the components used as well as on the exact calibration/adjustment to one fixed value or several values of a calibration curve.

For given % values (e.g. $\pm 2\%$), it is important to know whether these refer to the currently shown value or to the upper value of the measur-

ing range.

The term "digit(s)" refers to a so-called "numerical step" (digital scale divisions) of a digital display.

For analogue gauges (pointer devices), the accuracy is commonly identified by "classes" (e.g. class 1 or class 1.6).

■ RESOLUTION OF THE ANALOGUE/DIGITAL DISPLAY

The term of "resolution" is often mixed up with accuracy or used as a synonym. This is wrong. High resolution does not automatically result in high accuracy.

The term of "resolution" that refers to an analogue or digital display only describes the number of readable digits (e.g. 000.00 = 5 digits) or more often the number of decimal places, commonly referred to as "reading accuracy". In this context, resolution is described using values (1 or 0.1 or 0.01) or digits (referring to the least significant digit).

■ REFERENCE/CALIBRATION STANDARD

In Germany, the supreme authority for calibration standards is the Physikalisch-Technische Bundesanstalt (PTB) in Brunswick. The PTB calibrates "standards" which are used by the DKD (Deutscher Kalibrierdienst) for calibrating meters and standards for factory calibrations. These in turn are used by the meter manufacturers for calibrating their units.

Such calibration standards/meters exist for the meters designed and manufactured by us for temperature measurement (for both mechanical sensors and for the units using infrared surface temperature measurement, also referred to as "pyrometer") and for air humidity measurement.

Thus, fixed specifications exist for these two application ranges which means that the accuracy is therefore based on the grade of the sensors used and their exact adjustment.

For wood moisture measurement, there are no standard or other values specified by an officially recognised institution (exception: the calibration curve, based on the DIN 1052 standard, for spruce wood specified by the Materials Testing Institute of the University of Stuttgart (MPA Stuttgart, Otto-Graf-Institut (FMPA)) for the recognised glued laminated timber industry.

This also applies to measuring set building materials and a number of bulk materials (exception: certain types of grain, as far as these are commercially used for accounting purposes).

The term of "gauging" is actually reserved for the Gauging Office. "Gauging" refers to the calibration procedure performed by the Gauging Office. Basically, this only refers to equipment that is used for trading purposes, e.g. scales.

The calibration curves for the individual types of wood or building and insulating materials are created by reliable equipment manufacturers themselves. These curves are created using a complex procedure involving numerous series of measurement for each type of wood or each building or insulating material, based on the oven-dry test procedure. The calibration curves created that way are business secrets of a manufacturer.

■ QUALITY RATING OF THE SENSORS USED


SENSORS FOR MEASURING THE TEMPERATURE

Temperatures are measured using a large variety

Temp.	Class A	Class B
-100 °C	0,35 °C	0,80 °C
0 °C	0,15 °C	0,30 °C
+100 °C	0,35 °C	0,80 °C
+200 °C	0,55 °C	1,30 °C

GRAPHIC A

Measuring accuracy for Pt100 sensors

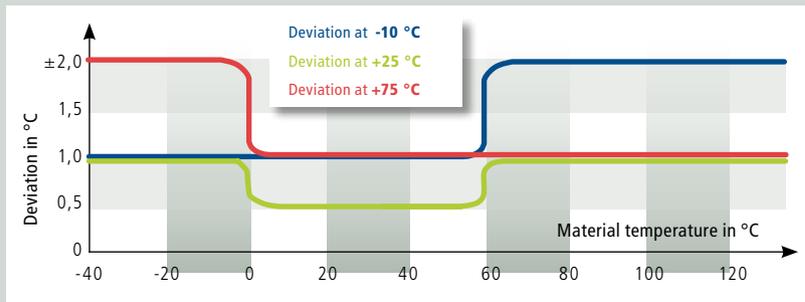

GRAPHIC B

Measuring accuracy of infrared sensors at different ambient temperatures

of sensors. For measurement equipment of higher quality, temperature measurement of gas/air, liquids, bulk materials, and solids using platinum measuring resistors (e.g. Pt100 in 4-wire technology) has gained precedence. Of course, there are also different classes of accuracy (refer to graphic A).

More information on accuracy of Pt sensors is found on the web. For achieving acceptable measuring accuracy, at least class B sensors are required to be used.

For measuring surface temperatures on objects having high heat content and good thermal conductivity, also thermocouple sensors (cross- or dual-band sensors) are used. However, accuracy in the range that is relevant to dew point measurements is not always sufficient.

All mechanical temperature sensors (contact thermometers) are reasonably used only in cases where the media to be measured have sufficiently high heat content and corresponding good ther-

mal conductivity.

Insulating materials consisting of foamed plastics, wood or wooden materials, compound materials having different thermal conductivity (e.g. bonded wallpapers etc.) or materials having a rough or uneven surface, moving, or vibrating parts either cannot be measured using mechanical sensors or the accuracy achieved is not sufficient.

For this purpose, infrared surface temperature measuring equipment providing good sensor accuracy is available today. Our equipment that is used in the classic application of climate monitoring in residential or business rooms includes such sensors. In particular, this applies to the assessment of damage caused by humidity (e.g. mould formation (fungal growth) by undershooting the dew point temperature). An accuracy of ± 0.5 °C is very important for determining the dew point on wall surfaces (refer to graphic B). The higher the inaccuracy in this range, the higher the inaccuracy span for establishing the dew point undershoot

temperature. Furthermore, entering the correct emissivity for the surface material to be measured is of high importance.



SENSORS FOR GATHERING THE AIR RELATIVE HUMIDITY

Accuracy and long-term stability of the sensors for gathering the air relative humidity have been significantly improved within recent years. This is also true for measurements in contaminated air where the sensors have to be protected by appropriate filter systems. Sometimes, filters significantly extend response times which contributes to inducing measuring errors if values are read too early. Also, adapting the temperature of the sensor to the ambient/air temperature is very important. Measuring systems of higher quality (e.g. for surveyors) have a typical accuracy of $\pm 1.8\%$ R.H and ± 0.3 °C temperature (or better) (refer to graphic C).

ABOUT MEASURING ACCURACY

To maintain this precision, such equipment should be checked for accuracy at the manufacturer or by an appropriate calibration laboratory every 12 to 24 months, depending on its application purpose and frequency.

When air humidity sensors are used for the determining humidity by means of sorption isotherms in solids (e.g. concrete, screed, brickwork, etc) the sensor or the sensor assembly must have sufficient accuracy even when used to measure air humidity values of 95% R.H.



SENSORS FOR GATHERING THE WOOD MOISTURE

Precise wood moisture measurements are mostly based on the resistance measuring technique. For measuring, two steel pins are pushed or tapped into the wood to be measured. For our meters, the pins should be driven in perpendicularly to the fibre direction. Particularly for wet wood, this heavily affects accuracy.

Another aspect that concerns accuracy, is setting/entering/selecting the correct type of wood. Implementation of this aspect depends on the respective

equipment manufacturer.

Medium-class equipment should have 4 or 7 wood species correction levels – high-class equipment should provide at least 75 options for wood species correction levels, if not even individual code numbers for each type of wood (from 250 numbers on). In the dry range, accuracy values of $\pm 0.5\%$ can be obtained.

For the different wood thicknesses, pins of 16, 23, 40, or 60 mm in length are available. For accurate measurement, these are to be driven in up to a third of the entire wood thickness. Moreover, Teflon insulated pins of 45 or 60 mm in length are available. Using these pins, individual layers or wood surfaces wetted by rain or dew can reliably be measured.

Another popular option is measuring the wood moisture using a capacitive sensor. These units are also referred to as put-on units. Most of them have area or spring sensors. Area sensors require a relatively large and in any case plane contact area (planed surface). This also applies to units having wide spring structures. Compared to these, the ball-shaped sensor used in our units has application benefits. With regard to accuracy, larger measured value deviations are to be expected from put-on units.

Wood types such as beech the moisture of which is evenly distributed between surface and core and which have no branches or spiral growth and have a constant volume weight (specific gravity, gross density) can be measured very well and quickly. Pieces of wood showing heavily varying gross density, different wood thickness, or irregularly distributed humidity can be measured with sufficient accuracy only when using additional tools. When you consider purchasing a put-on unit we recommend to consult our experts.



SENSORS FOR GATHERING STRUCTURAL MOISTURE (SET BUILDING MATERIALS)



RESISTANCE/CONDUCTIVITY MEASURING TECHNIQUE

This value is measured using two steel pins, pipe probes (using contact paste), or brush probes. For the designs that are adapted to the different measuring tasks, please refer to our catalogue. Optimum contact between sensor and material is crucial to obtain high reproducibility.

Here, a general statement on accuracy of weight

GRAPHIC C

Typical characteristic curve using the example of our RH-T sensors

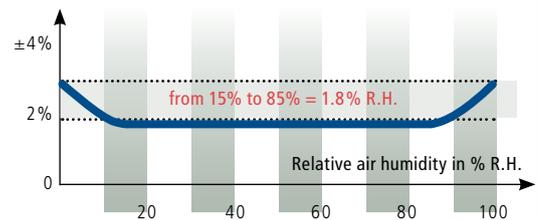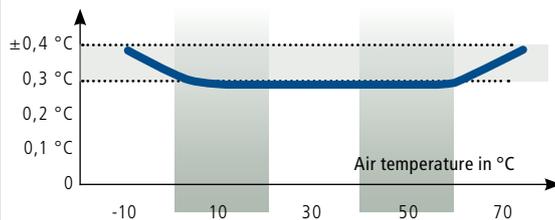

or mass percentage is hardly possible. Unmixed building materials with the latest calibration curves can be measured with good accuracy as opposed to mixed brickwork. But exact percentage values are often not necessary and so-called comparing measurements are absolutely sufficient.

CAPACITIVE RADIO FREQUENCY MEASUREMENT

The so-called “ball probe” invented by us is a sensor for detecting moisture in many different materials (e.g. damage caused by moisture in rooms and buildings, mobile homes, caravans, boats, concrete, or plastics as well as in many other solids). Also, unmixed building materials having the latest calibration curves can be measured with good accuracy using this measuring technique. However, the accuracy obtained is less when measuring mixed brickwork or layered compounds consisting of different materials. As mentioned before, exact percentage values are often not necessary and so-called comparing measurements are absolutely sufficient.

MEASURING THE AIR RELATIVE HUMIDITY IN HOLE

For this purpose, high-quality air humidity sensors suited for high humidity values must be used to determine moisture in solids (e.g. concrete, screed, brickwork). For measuring, the sensor is inserted into a prepared hole. The sensors should have good long-term stability in high air humidity (80 to 95% R.H.) as well as $\pm 3\%$ accuracy or better. The air humidity values are converted into weight percentage values for building materials using sorption isotherms by means of automatic processor-supported conversion within the units or using tables provided in the operating manual.

CALCIUM CARBIDE METHOD

The humidity content of screeds is determined by means of a CM unit using a mechanical-chemical process. Accuracy essentially depends on correct sampling (across the entire cross-section, low humidity loss during sample preparation) and tightness of the pressure system.

■ PROPER MEASUREMENTS

The headline already tells what is meant. An “ideal” unit should be self-explaining, self-learning and work as independently as possible. Our Hydromette units have been designed and engineered following these considerations. However, there will always be situations in which you will have to look into the operating instructions. Reading the operating instructions is one of the less pleasant and time-consuming things. But you will find that many problems will virtually settle on their own. Even if you have never worked with one of our units, reading the instructions that contain many pins on the particular topic and performing a small trial session will enable you to carry out your measuring task like a professional.

Your knowledge, your eyes, your technical skills, and our meters are parts of a successful top team.

It might be quite embarrassing “to be eaten up” by the lawyer of the opposing side, when the surveyor reads the instructions to you, or to be made to pay up for a damage, although you have the best meter on hand. You will find a lot of sticking points in connection with moisture measurement which you have not taken into account and which could have easily and quickly been avoided by means of properly performed measurement. Spare the second visit on site, the faulty survey

report, the damage that could have been avoided in most cases.

We are here for you – when there are problems with moisture measurement or when you have no answer to your question, irrespective of the comprehensive operating instructions.

MEASURED VALUE ASSESSMENT

Professional assessment of the measured value indicated is the task of the expert – e.g. the decision on whether the 95 digits measured are still sufficient or too much considering a specified value of 90 digits. To assess e.g. an air humidity measured value, it is important to know whether the measurement was made in the more humid northern area or in the Alps region that is more dry and in which season it was made. Or whether the measurement was made in a humid vaulted cellar or in the hobby room of a newly erected building. Are there many flowers or hydroponics with fountains in the living room? All these and other factors have an impact on the “natural” humidity in the household. And in the end, only you as the expert can assess these different conditions. Similarly, this applies to structural moisture and to the moisture of other materials. In addition to the pins in our operating instructions, you may find other tips given by the manufacturer of the material or on the web, or you may consult our expert consultants.


We are your competent partner.

MANUAL MONITORING OF THE DRYING PROCESS





MEASURING POINT SELECTOR

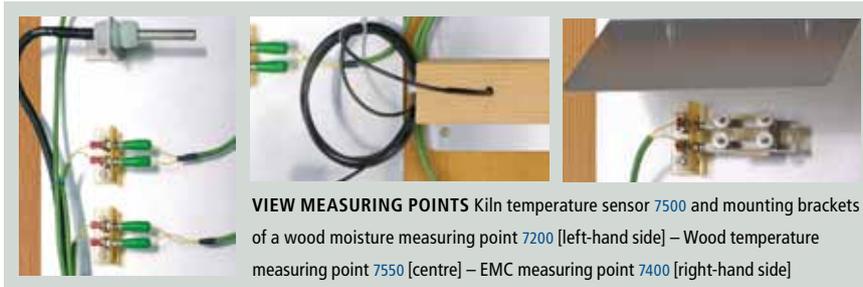

- Central retrieval station for different wood or structural moisture measuring points that are based on the resistance principle of measurement.
- Depending on the particular type, additional measuring points for retrieving the temperature (on Pt100 basis) may be connected
- The measured values may be retrieved by means of a Gann Hydromette (refer to the bottom of the page)
- Applications include: manual wood drying or manual long-term measurements of the drying condition of buildings (in newly erected or refurbished buildings)

TKMU-6 MEASURING POINT SELECTOR 7100

- Up to 6 wood/EMC or structural moisture measuring points

TKMU-6/1 MEASURING POINT SELECTOR 7101

- Up to 6 wood/EMC or structural moisture measuring points
- 1 additional temperature measuring point may be connected

TKMU-6/2 MEASURING POINT SELECTOR 7102

- Up to 6 wood/EMC or structural moisture measuring points
- 2 additional temperature measuring points may be connected



7100



7101



7102

	H 35	BL H 40	HT 65	BL HT 70	HT 85 T	M 2050	HB 30	BLE	UNI 1	UNI 2	RTU 600	M 4050	
TKMU-6					•			•			•	•	7100
TKMU-6/1		•	•	•	•	•				•	•	•	7101
TKMU-6/2					•	•				•	•	•	7102



7200

WOOD MOISTURE MEASURING POINT 7200

- For measuring the wood moisture in a wood drying kiln

EQUILIBRIUM WOOD MOISTURE CONTENT MEASURING POINT 7400

- For measuring the equilibrium wood moisture content (EMC) in a wood drying kiln

KILN TEMPERATURE MEASURING POINT 7500

7500

- For measuring the air temperature in a wood drying kiln

WOOD TEMPERATURE MEASURING POINT 7550

- For measuring the wood temperature in a wood drying kiln



7550



7400



7500



System overview of a wood drying kiln, please find more on our website



MEASURING POINT ACCESSORIES

SOCKET WRENCH 7250

- For driving into and extracting the measuring electrodes from the wood

MOUNTING BRACKET 7354

- Including mounting hardware for connecting the wood moisture or EMC measuring points

ELECTRODE LEAD

- Teflon insulated cable
- For connecting the wood moisture electrodes to a mounting bracket

e.g. 4 m [L] 7304, 5 m [L] 7305, 6 m [L] 7306

ELECTRODE SILICON LEAD

- Teflon insulated cable
- With additional silicone sheathing for increased resilience

e.g. 4 m [L] 7284, 5 m [L] 7285, 6 m [L] 7286


MEASURING POINT LEAD

- For connecting the mounting bracket to a TKMU measuring point selector


e.g. 10 m [L] 7330, 20 m [L] 7340

EMC ELECTRODE HOLDER 7402

- For measuring the equilibrium wood moisture content (EMC) in the drying kiln using a EMC sensor

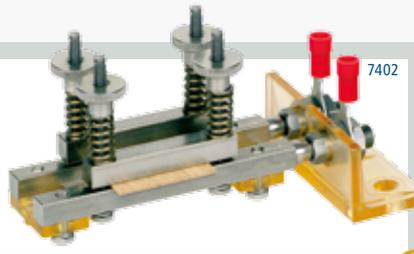

VIEW Mounting bracket [left-hand side] with EMC electrode holder and EMC sensor [right-hand side] inserted

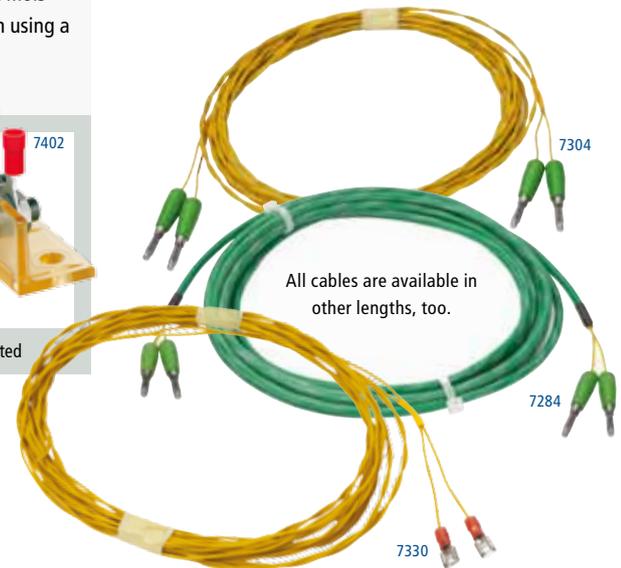


7330

7284


7304

REPLACEMENT PARTS FOR DRYING PROCESS MONITORING

Electrodes, non-insulated

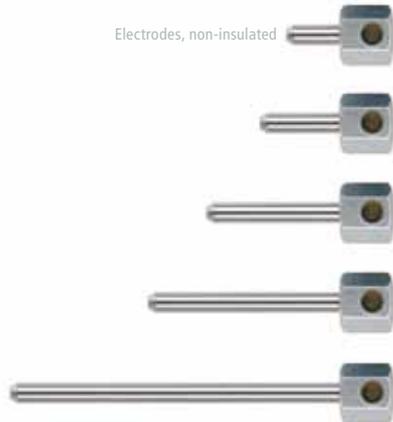

Electrodes, insulated

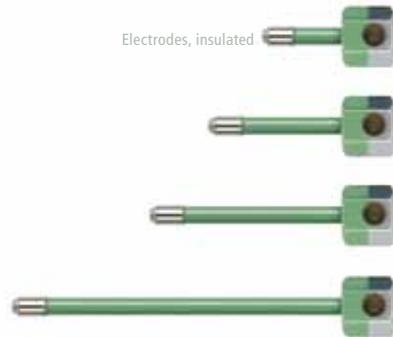

STAINLESS STEEL DRIVE-IN ELECTRODES

- Stainless
- Without insulation
- For drying kiln use
- 10 mm [L] 7201
- 15 mm [L] 7202
- 25 mm [L] 7203
- 40 mm [L] 7204
- 70 mm [L] 7205

STAINLESS STEEL DRIVE-IN ELECTRODES, TEFLON INSULATED

- Stainless
- For drying kiln use
- Thanks to this insulation, only the core humidity is measured, while surface humidity is ignored
- 15 mm [L] 7207
- 25 mm [L] 7208
- 40 mm [L] 7209
- 70 mm [L] 7210



APPLICATION Connecting **non-insulated** [above] and **insulated** drive-in electrodes [below]




EMC SENSORS

- For sensing the equilibrium wood moisture content in a drying kiln using a EMC electrode holder
- Pack of 50 EMC sensors 7403
- Pack of 100 EMC sensors 7404



ÜBERSICHT overview

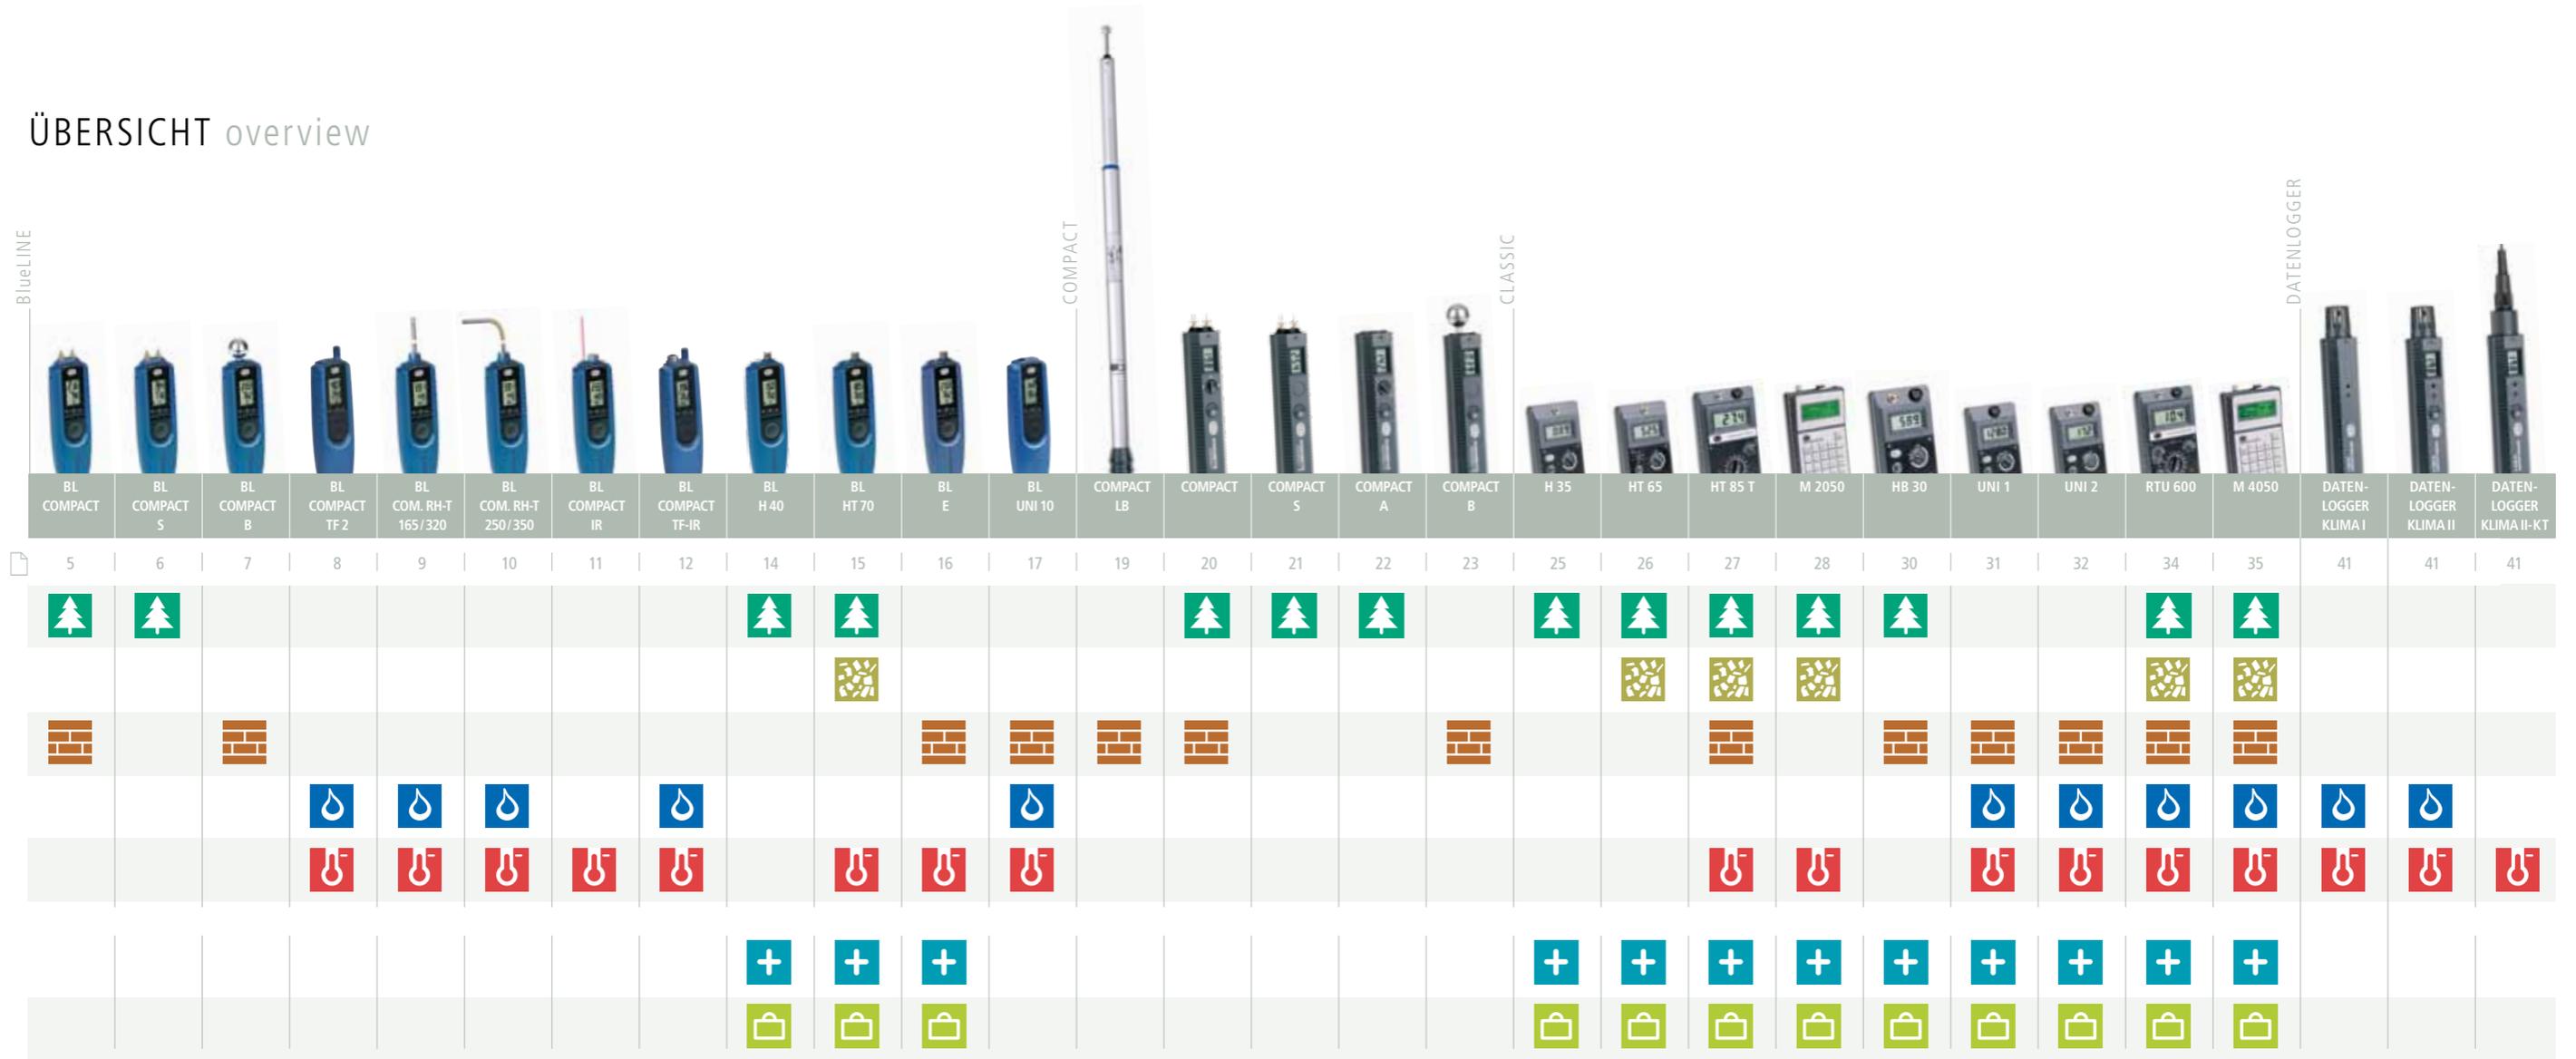

1931 ■ Firmengründung in Stuttgart Company foundation in Stuttgart → 1948 ■ Entwicklung des ersten „Hydromette“-Feuchtemessers Development of the first „Hydromette“ moisture meter → 1960 ■ Markteinführung der ersten vollautomatischen Regelanlage für Schnittholztrockner Launch of the first fully automatic controlling system for timber drying kilns → 1983 ■ Patentierung des kapazitiven Messverfahrens »Kugelsonde« The capacitive measuring method is patented »ball sensor« → 2009 ■ Einführung der Blue Line-Serie Introduction of the BlueLine series

Gestaltung: Anette C. Weber ■ Fotos: GANH / J. H. Kapsjamsidis / T. Reiche / Bildagentur24 / Fotolia ■ Techn. Änderungen sowie Druckfehler vorbehalten 7-2012



GANN MESS- U. REGELTECHNIK GMBH
Schillerstrasse 63
70839 Gerlingen
GERMANY

NATIONAL

TELEFON 071 56 - 4907-0
FAX 071 56 - 4907-40
E-MAIL verkauf@gann.de

INTERNATIONAL

PHONE + 49-71 56 - 4907-0
FAX + 49-71 56 - 4907-48
E-MAIL sales@gann.de

INTERNET

www.gann.de



BlueLINE-SERIE
blueline series



COMPACT-SERIE
compact series



CLASSIC-SERIE
classic series

